



# WRIA 7 Watershed Restoration and Enhancement Committee

February 13, 2020

# Agenda

1. Standing Business
  - Introductions
  - Review agenda
  - Approve December meeting summary
  - Updates and Announcements
2. Planning Horizon Consumptive Use Estimate
3. Estimating Water Offset from Habitat Projects
4. Workgroup/Project Subgroup Progress
5. Next Steps and Action Items



# WRE Local Plan Approval Process Form

Originally due February 7  
Extended to February 20

## WRE Plan Local Approval Process

What is your organization's plan local approval process? All members of the WRIA 9 Watershed Restoration and Enhancement Committee must approve the plan before Ecology's review. The legislation does not require governments and organizations on the Committee to go through a formal internal approval process before approving the plan. Please consult with your organization to determine your internal review process and provide the following information to the Committee chair. The Committee chair may ask members to share information on internal plan approval processes and timelines at the February 2020 Watershed Restoration and Enhancement Committee meeting. *Please return this form to the Committee chair by February 23, 2020.*

Who at your organization will need to *review* the plan before approval?

- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_

Are there specific individuals or bodies that must authorize approval of the plan prior to your vote?

- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_

Briefly describe the process and timeline for reviews, including meeting schedule and/or frequency.

- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_

How can Ecology help?

- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_




# WRIA 7 Technical Memo Status


Technical Memo	Status	Feedback Requested	Due Date
Subbasins	Final Draft	Red flag review	2/28
Growth Projections	Final Draft (coming soon)	Red flag review	2/28
Consumptive Use	Final Draft	Red flag review	2/28

# Planning Horizon Consumptive Use Estimate


# WRIA 7 Subbasin Delineation

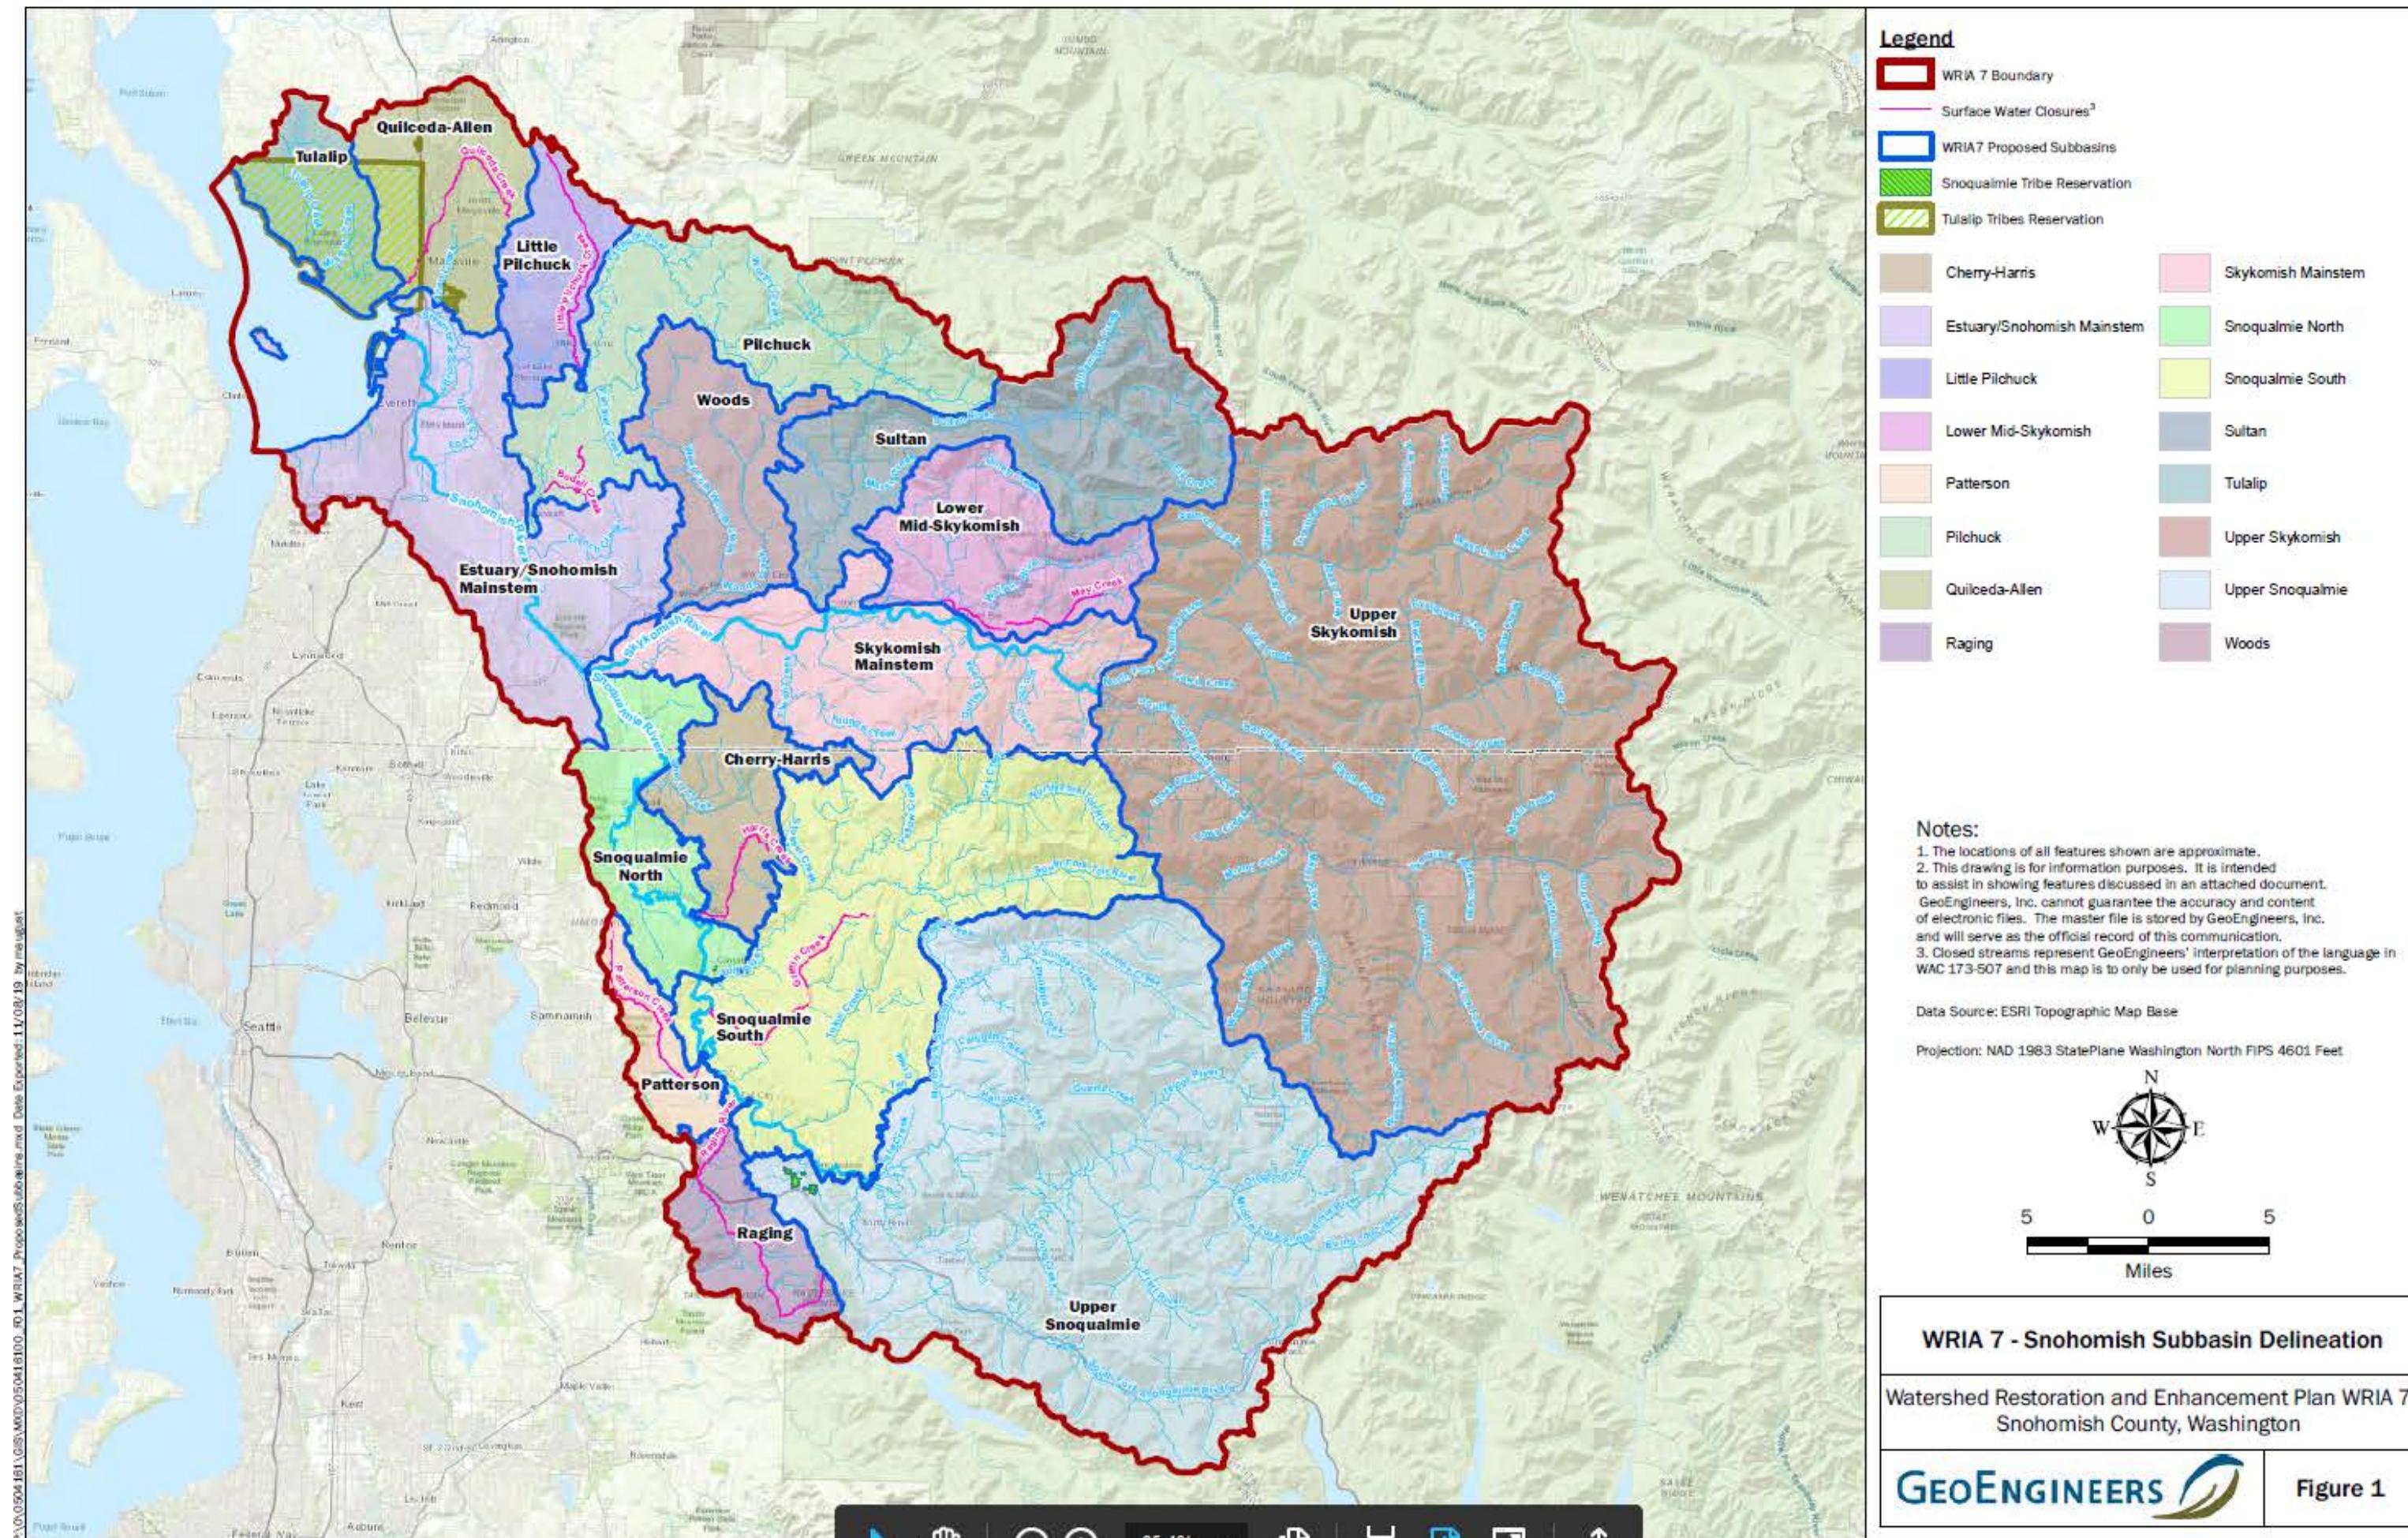

# WRIA 7 Growth Projection

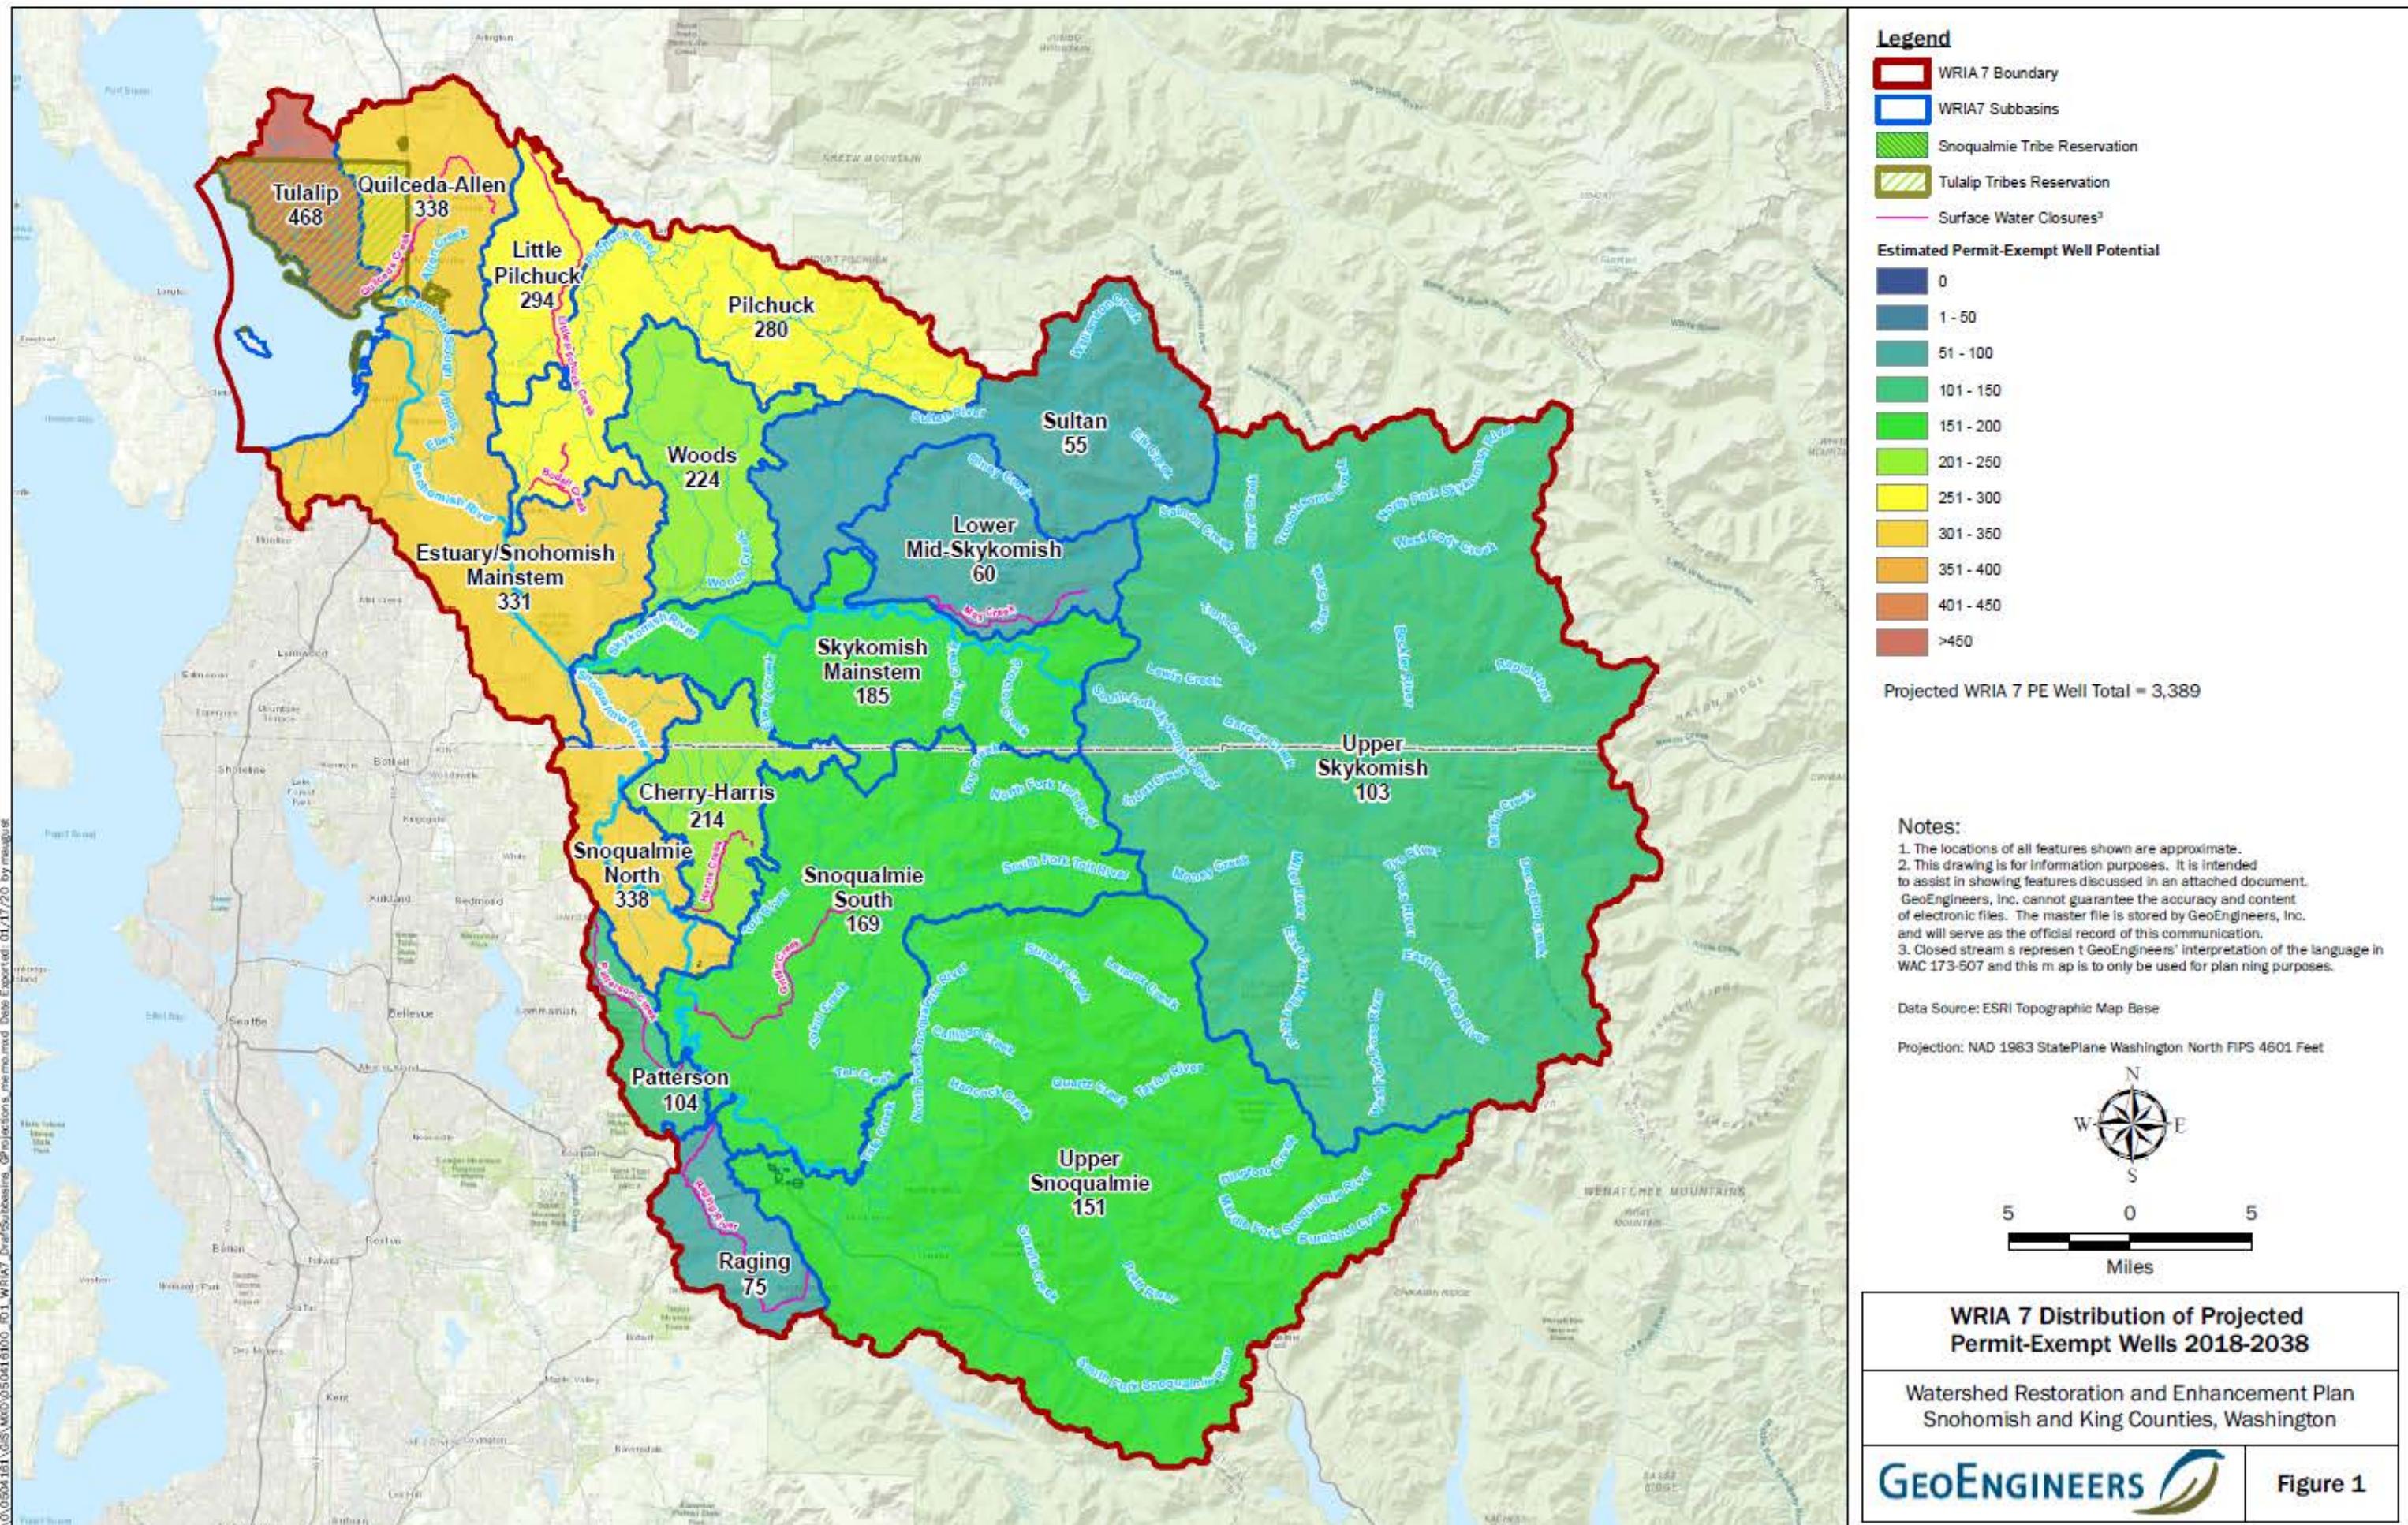

# WRIA 7 Consumptive Use Estimate

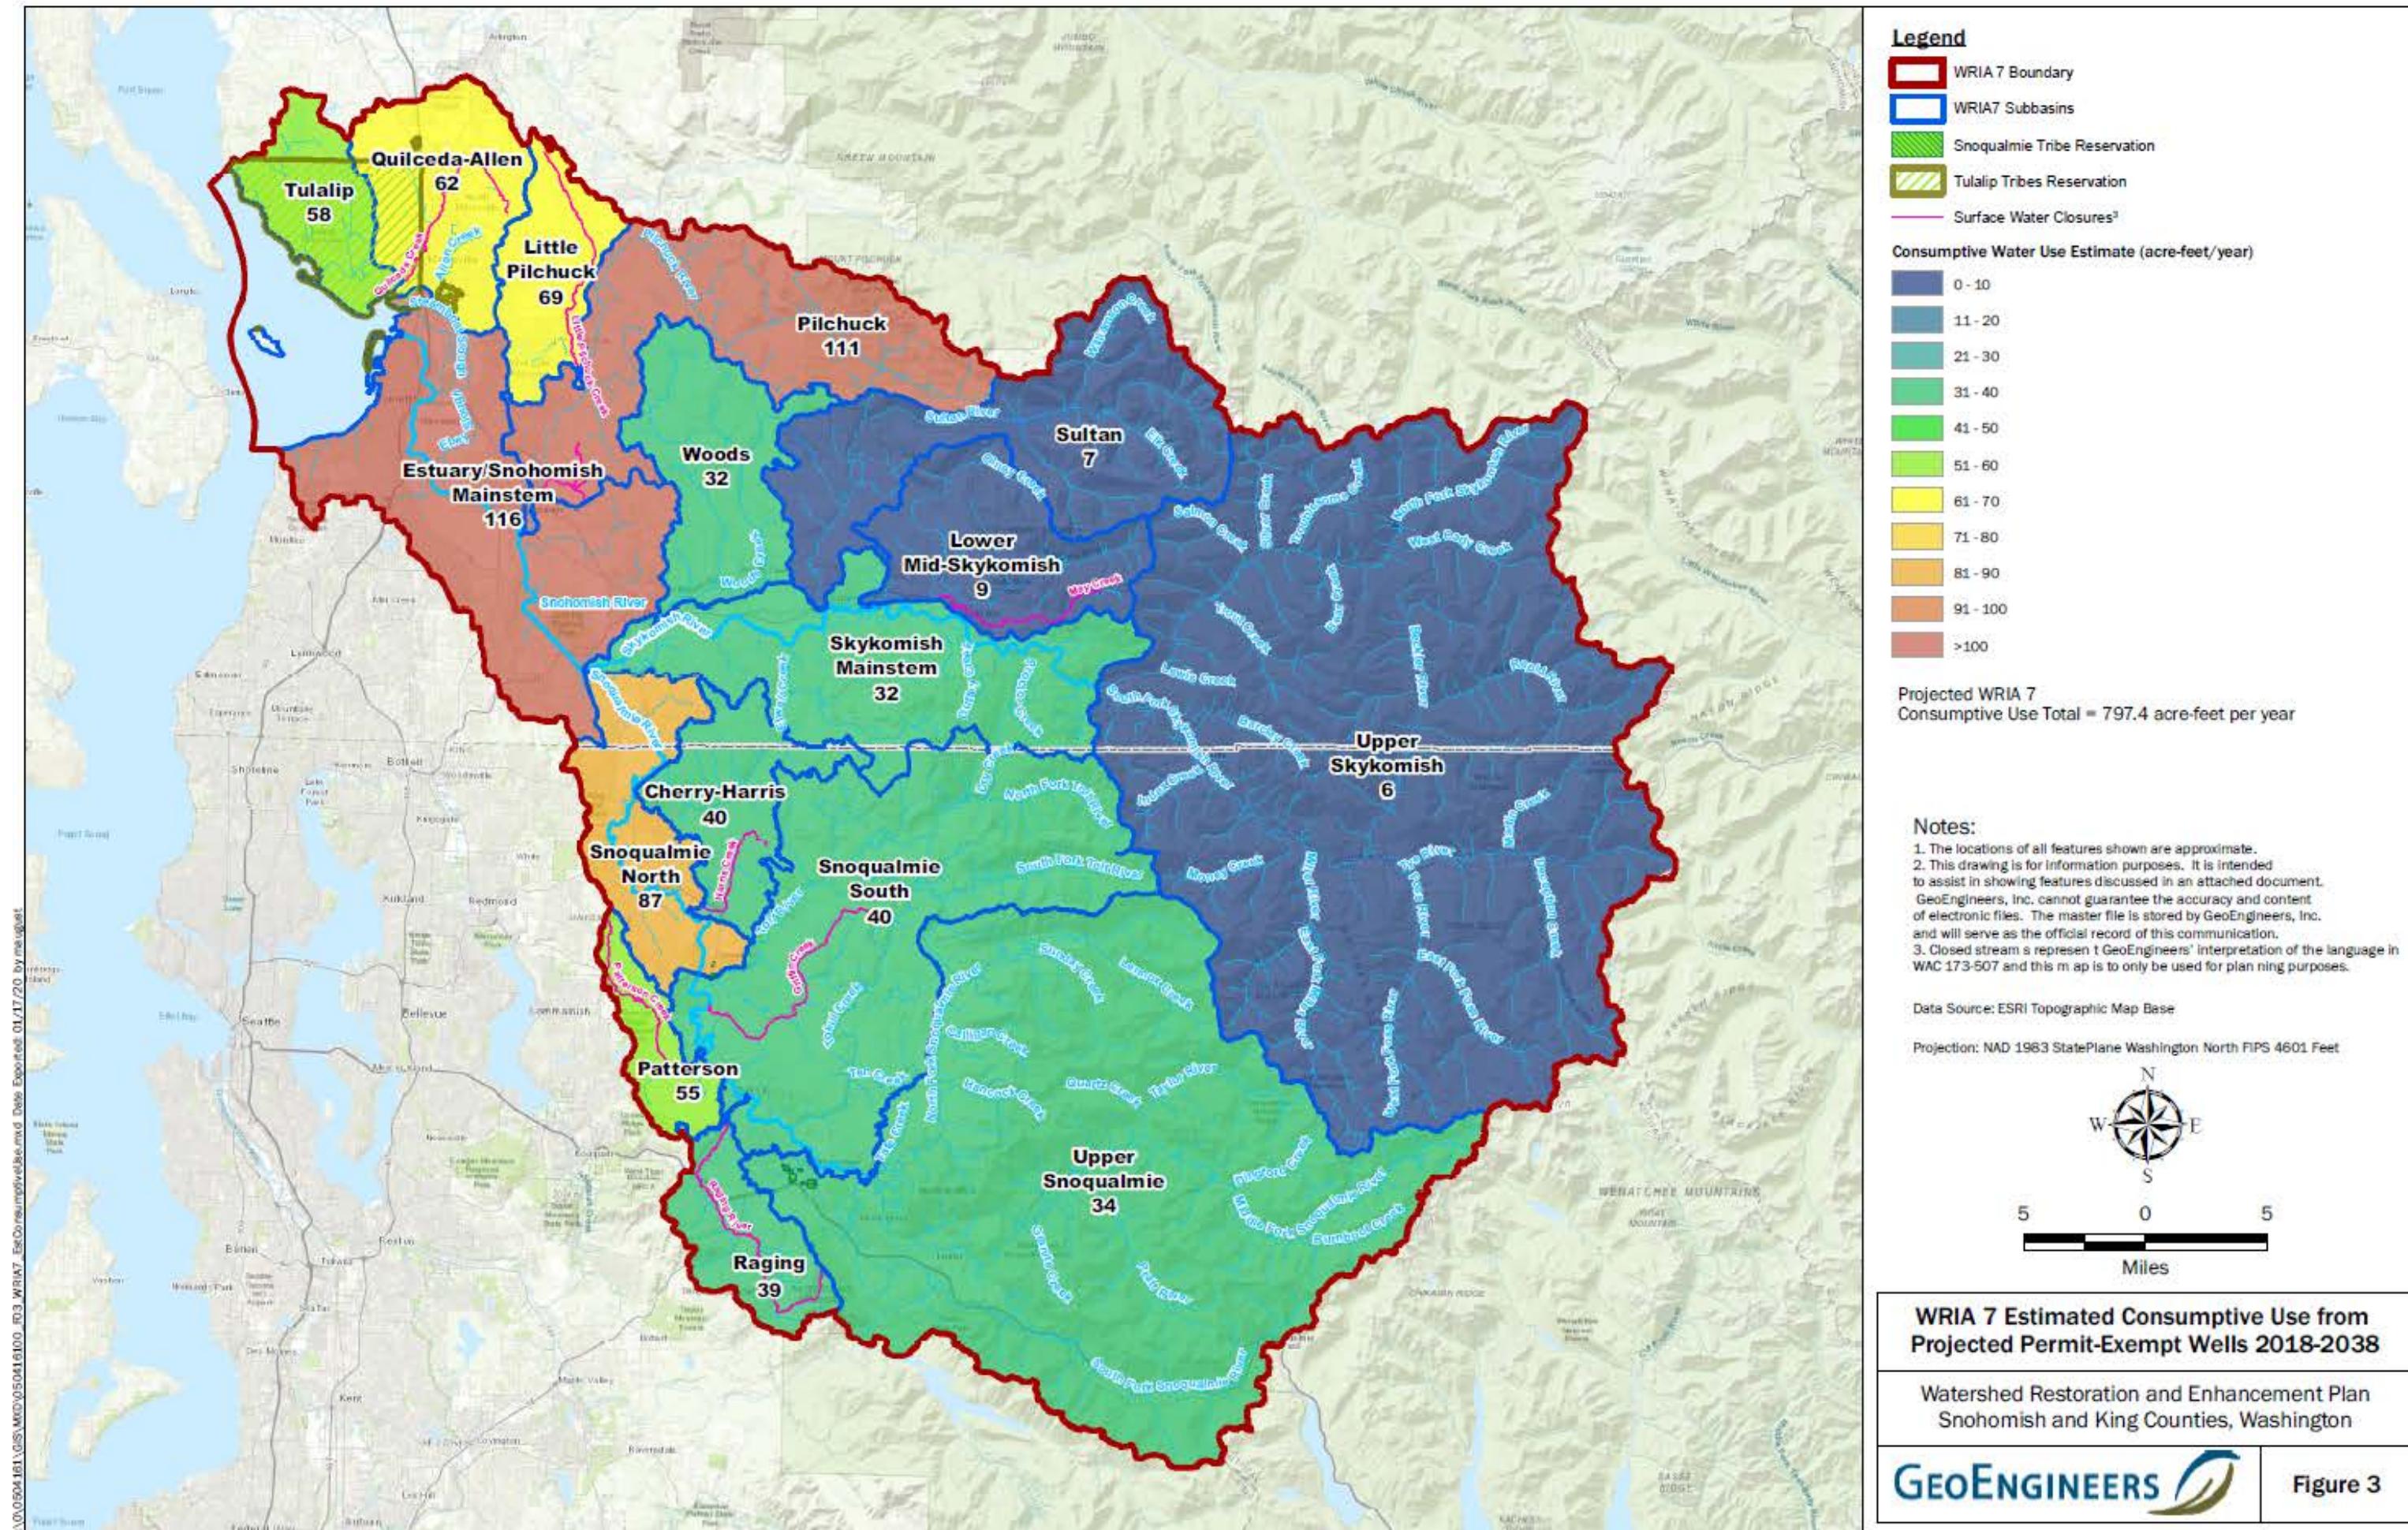

# Planning Horizon Consumptive Use Estimate

	WRIA 7
Projected wells	3,389
Average irrigated lawn size	0.21 acres
Average annual total household water use	407 gallons per day
Consumptive Use Estimate	797.4 acre feet/year

# Estimating Water Offset Benefits of Habitat Projects

# Estimating Water Offset from Habitat Projects



Bridget August, LHG  
Senior Hydrogeologist  
January 28, 2020



# Presentation Overview

- NEB Guidance Project Types
- Habitat Project Types with Water Offset Potential
- Effect of Restoration Projects on the Groundwater Regime
- Estimating Water Offset Potential
  - Project Example
  - Other Case Studies
  - Key Considerations
  - Simplified Analytical Method
  - Uncertainty
- Conclusions
- Next Steps



# NEB Guidance Project Types

- Water right acquisition offset projects
- Non-acquisition water offset projects
  - Typically re-timing or temporary “storage” of high flow surface waters
  - Projects may include:
    - Managed aquifer recharge (MAR) (e.g. spreading basins, infiltration galleries, etc.)
    - Source exchanges (e.g. surface water to groundwater, shallow to deep pumping, etc.)
    - Streamflow augmentation (i.e. “pump and dump”)
    - Off-channel storage
- ***Habitat and other related projects***


# Habitat and Other Related Projects

- “**Projects that focus on returning stream habitat to a more natural state** such as through river-floodplain restoration, instream habitat restoration, beaver reintroduction, and beaver dam analogs.
- **Projects that protect current habitats** through riparian or upland conservation and management, forest management, or water conservation.
- **Projects that increase connectivity and fish passage between habitats** such as fish barrier removal, or reconnection of off-channel habitat.”<sup>1</sup>




# Habitat Project Types with Water Offset Potential

- Projects that can Increase In-Channel Water Levels
  - Wood Placement (to mitigate channel incision)
  - Stream Restoration / Dechannelization
  - Beaver Introduction and Analogs
  
- Projects that can Increase Floodplain Water Levels
  - Floodplain Restoration / Reconnection
  - Levee Setback
  - Levee Removal

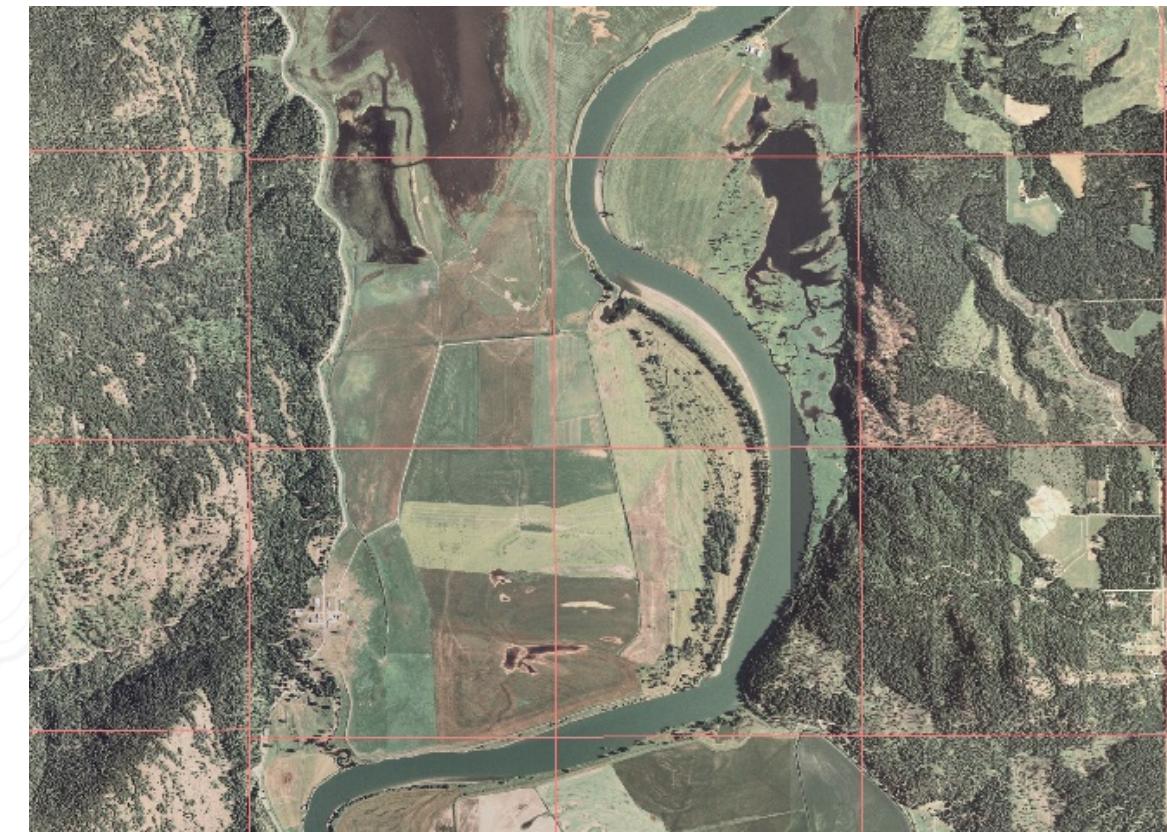


# Anatomy of a Habitat Project with Offset Potential

- Conceptual change in stream and groundwater table morphology following in-channel project
  - From: Hafen K and Macfarlane WW. 2016. Can Beaver Dams Mitigate Water Scarcity Caused by Climate Change and Population Growth? StreamNotes: The Technical Newsletter of the National Stream and Aquatic Ecology Center, USDA

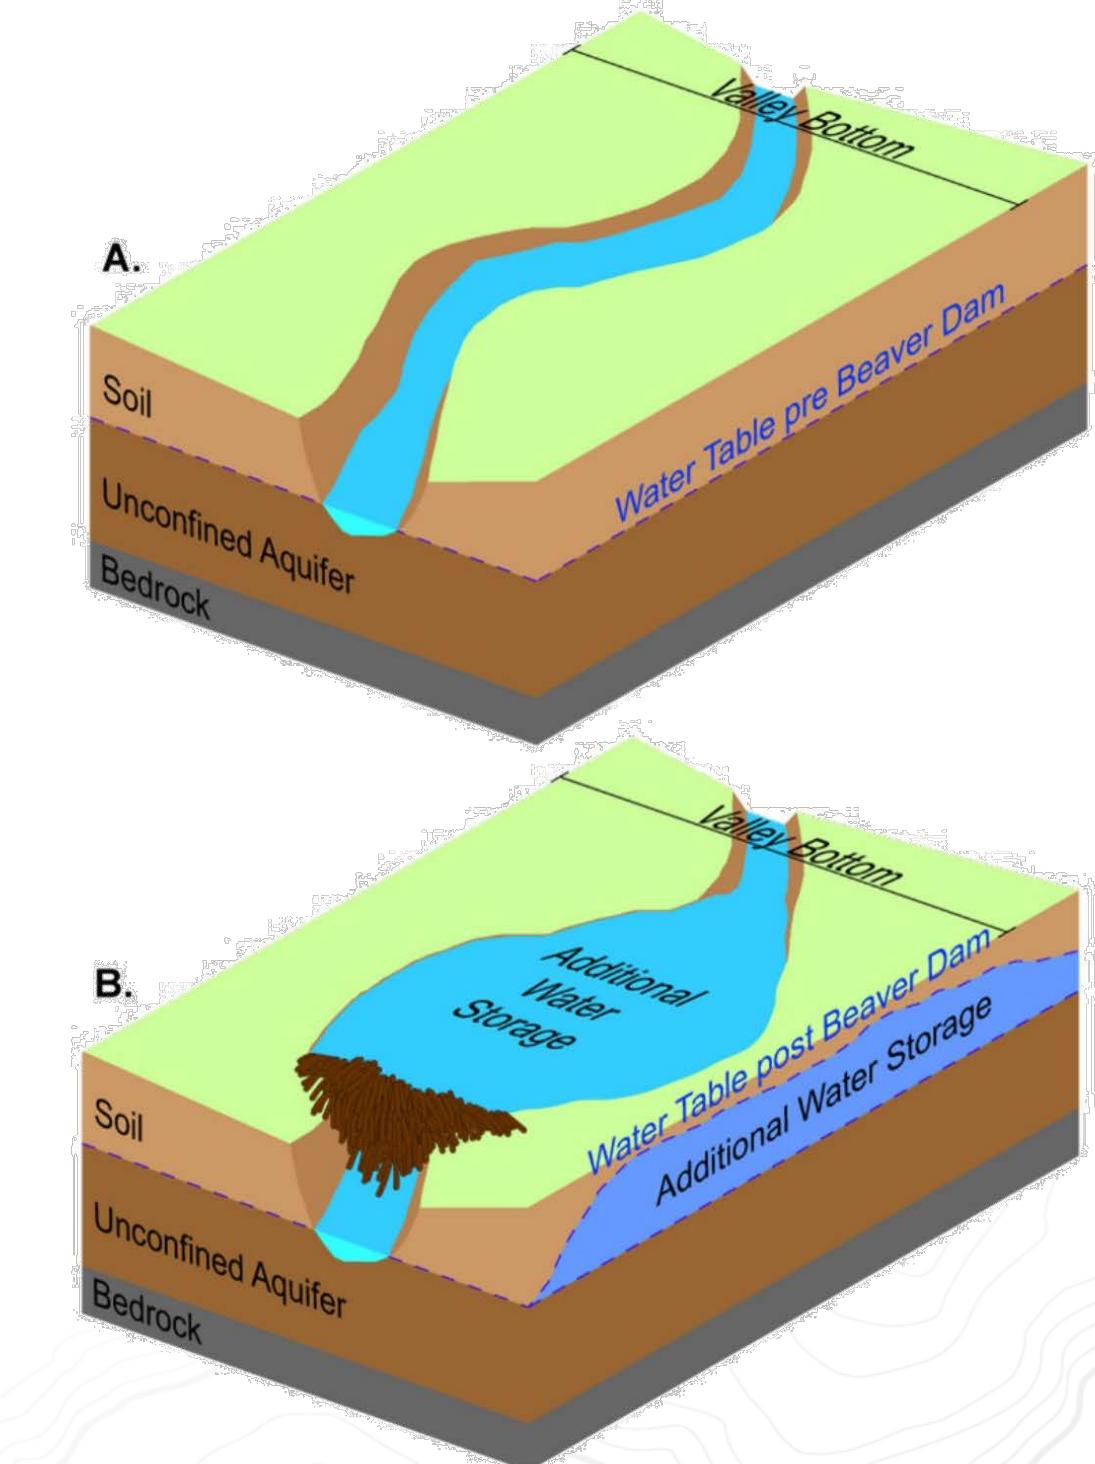


# Conceptual Evolution

- Stream and Adjacent Groundwater Table following Beaver Introduction
  - From: Pollock, M.M., G. Lewallen, K. Woodruff, C.E. Jordan and J.M. Castro (Editors) 2015. *The Beaver Restoration Guidebook: Working with Beaver to Restore Streams, Wetlands, and Floodplains*. Version 1.0. United States Fish and Wildlife Service, Portland, Oregon. 189 pp

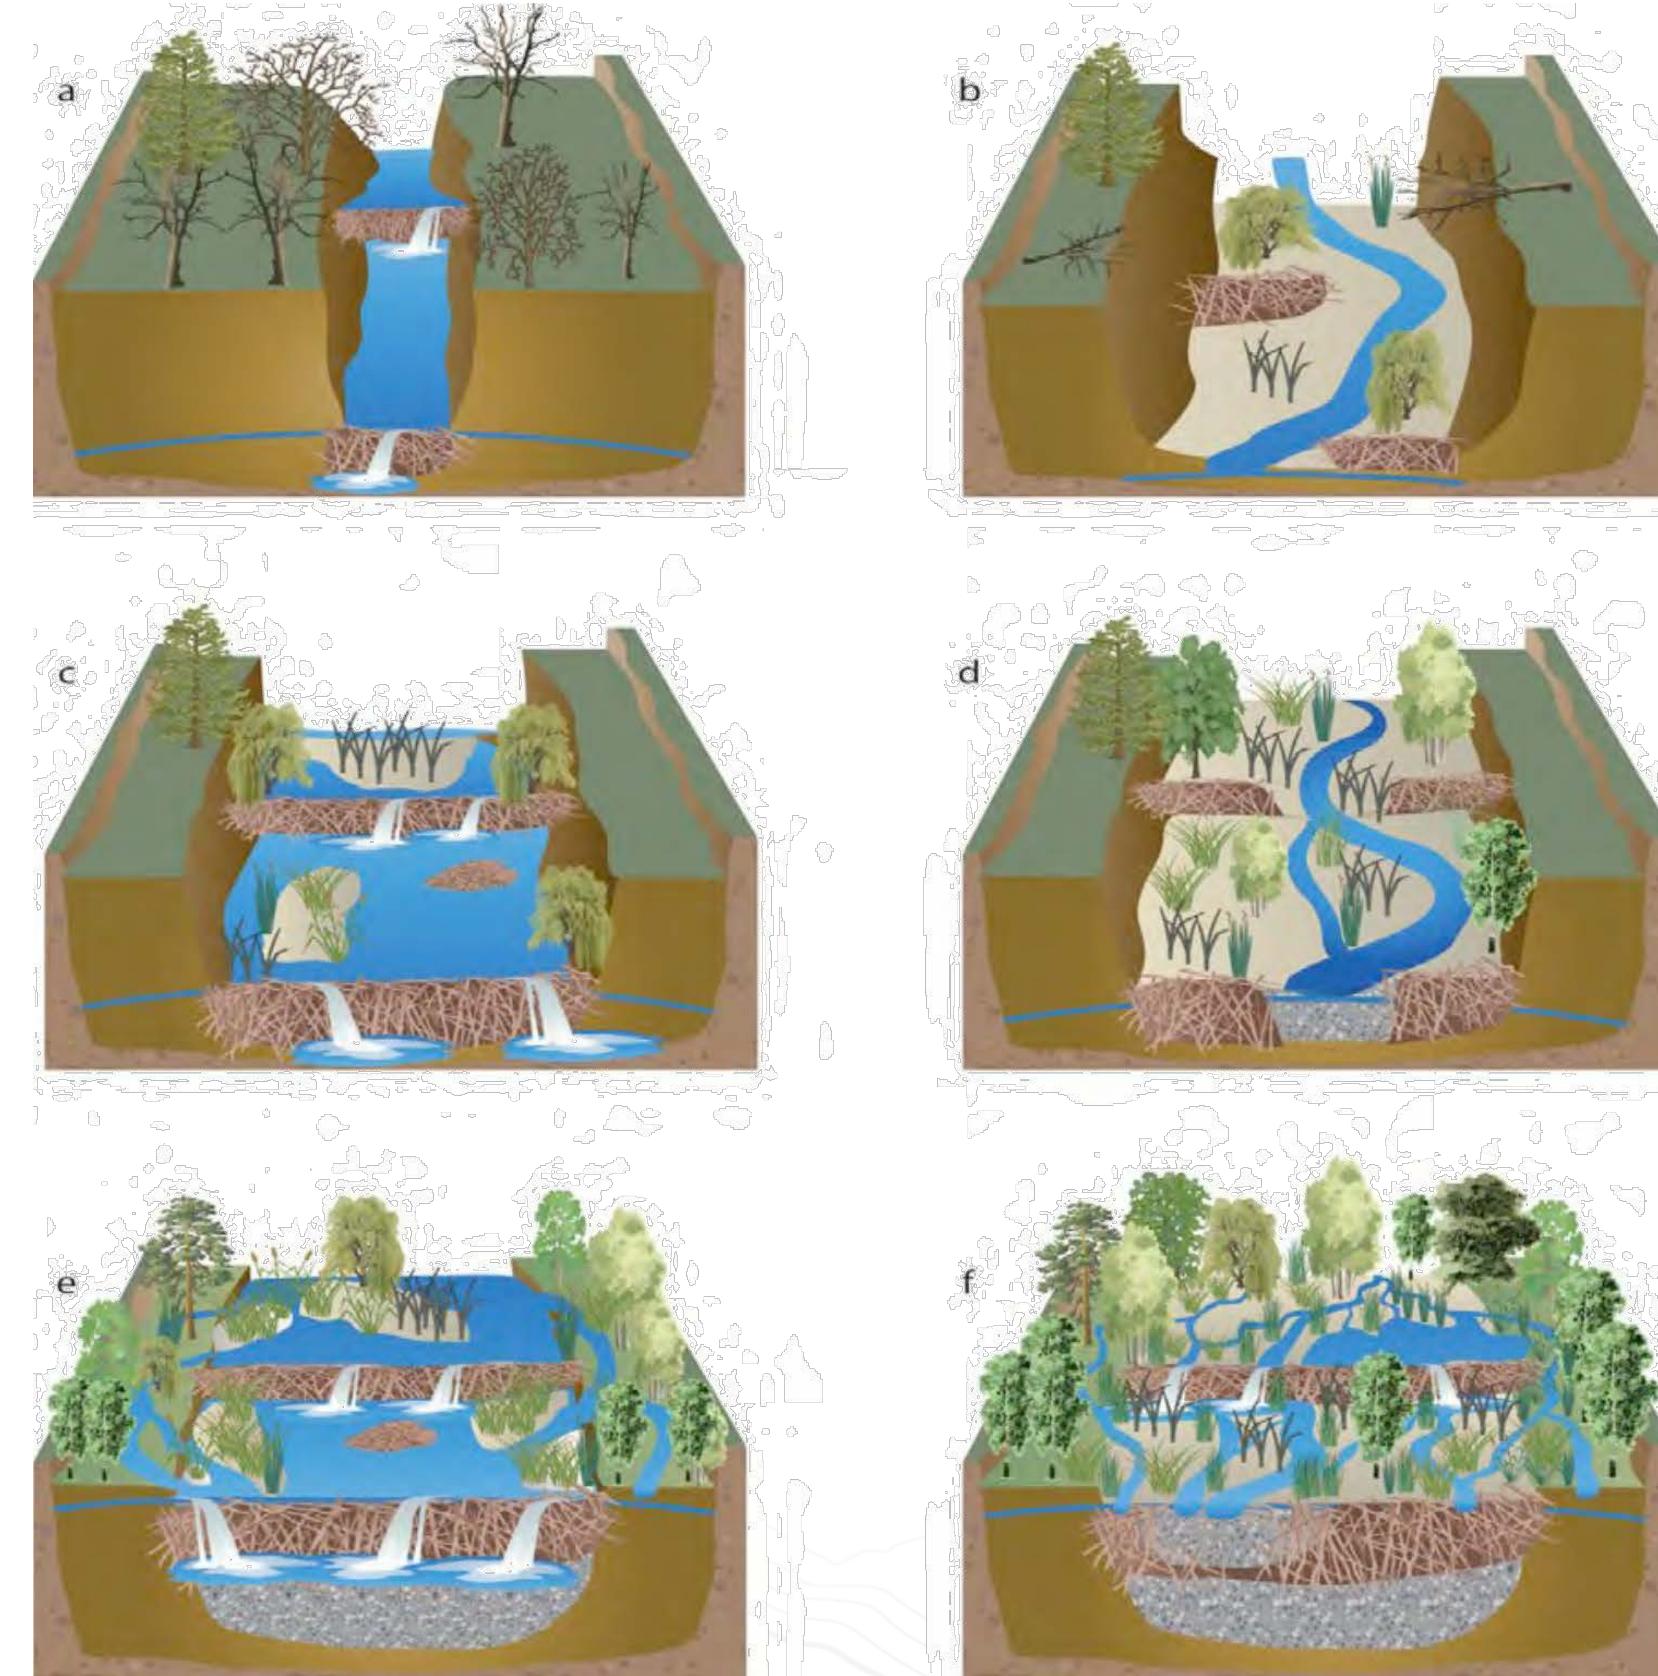


# Modeled Increase in Groundwater Table Elevation following Beaver Introduction

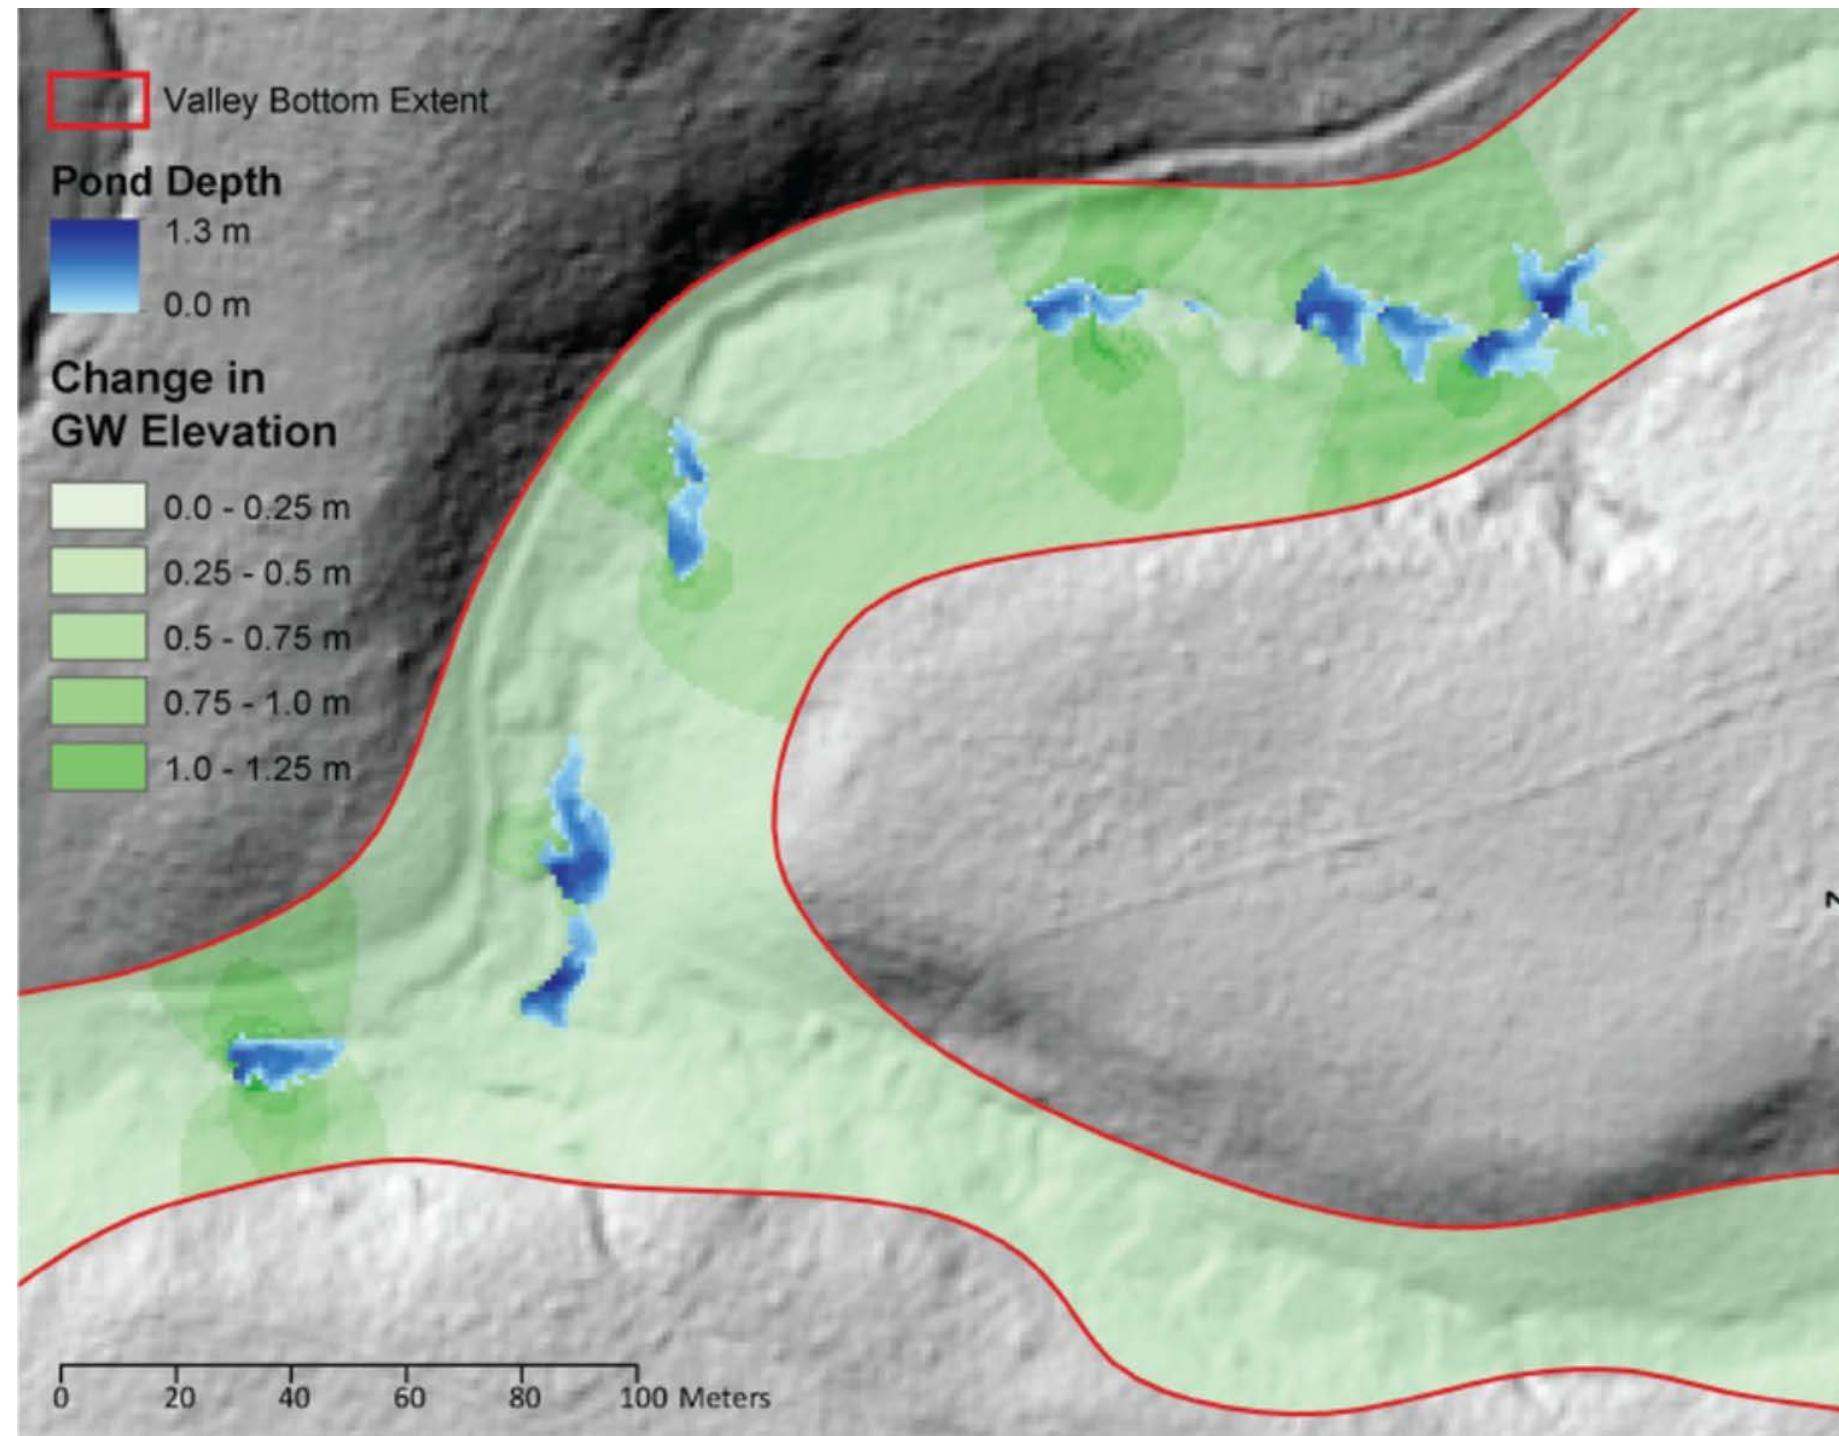

From: Hafen K and Macfarlane WW. 2016. Can Beaver Dams Mitigate Water Scarcity Caused by Climate Change and Population Growth? StreamNotes: The Technical Newsletter of the National Stream and Aquatic Ecology Center, USDA

# Effect of Restoration Projects on the Groundwater Regime


- Pre-Construction
  - Gaining Reach
  - Incised Channel
  - Abundant unsaturated sediment

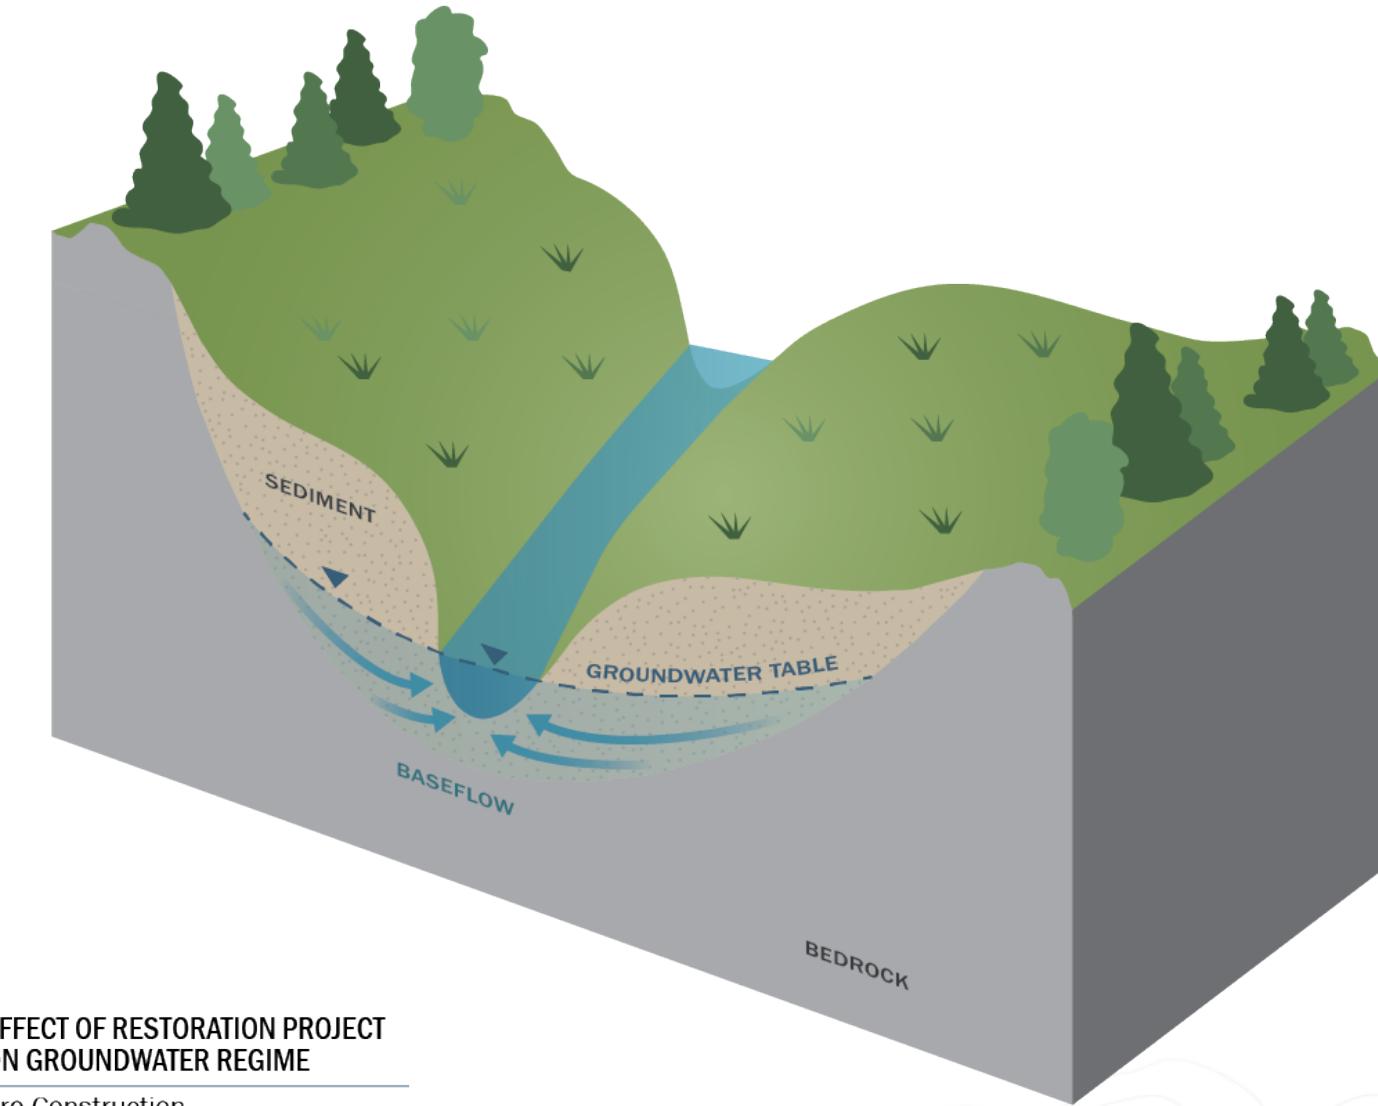

EFFECT OF RESTORATION PROJECT  
ON GROUNDWATER REGIME  
Pre-Construction

# Effect of Restoration Projects on the Groundwater Regime

- Post-Construction
  - Increase in surface and groundwater levels
  - Wedge of newly saturated sediment
  - Slight decrease in hydraulic gradient (slope of groundwater table)
  - Increase in baseflow

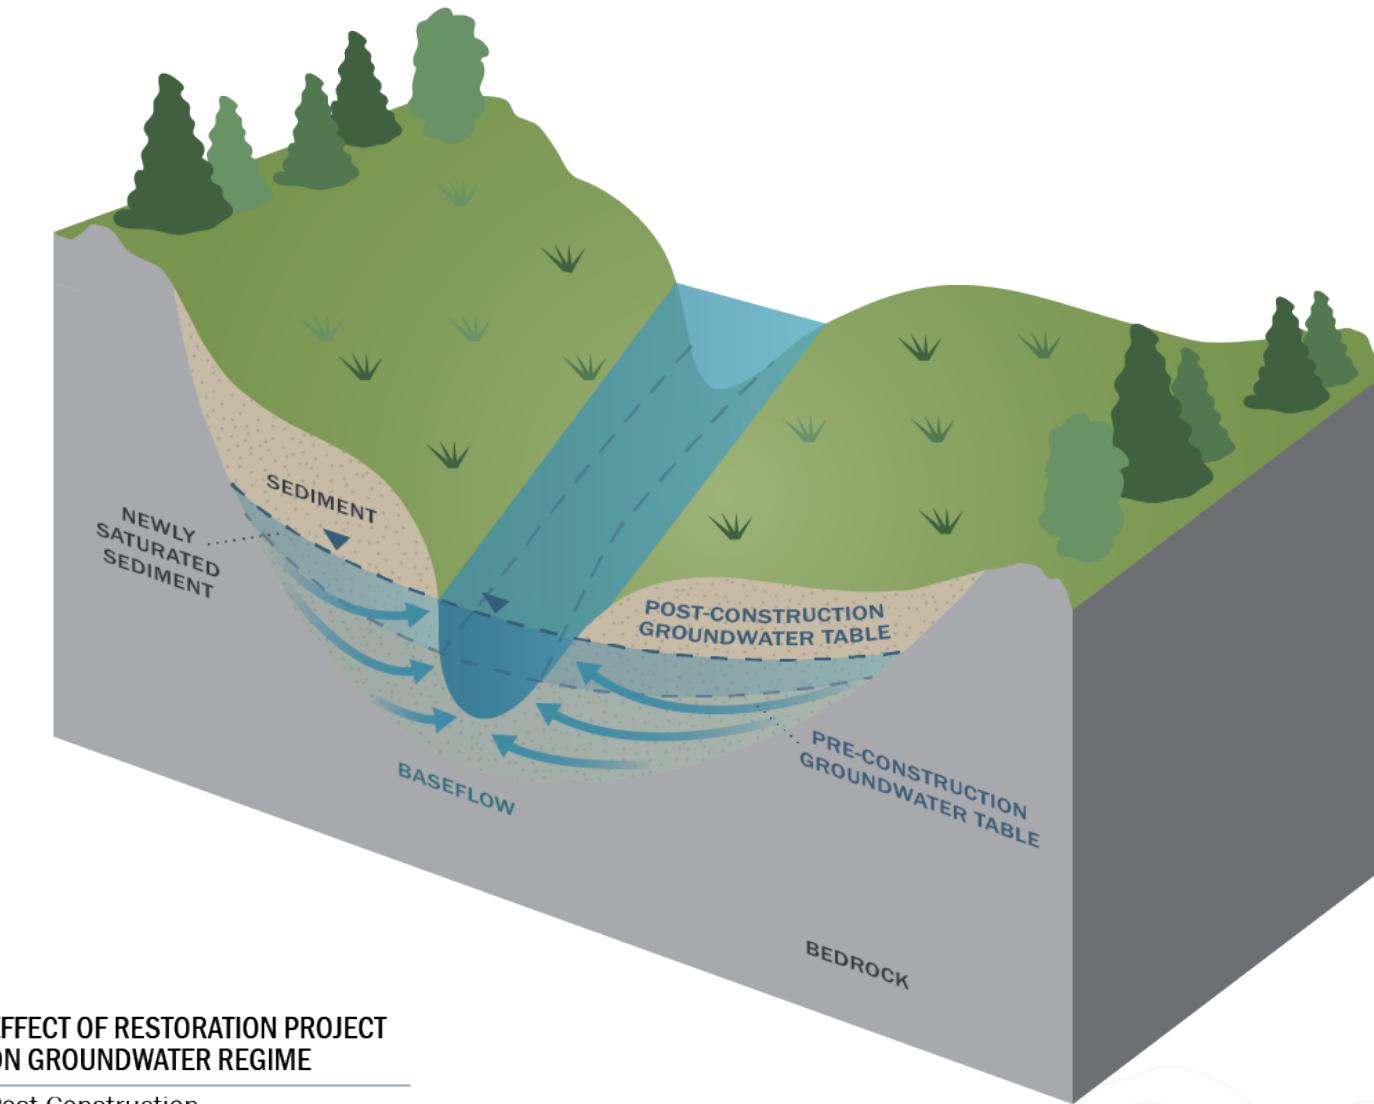



# Estimating Water Offset Potential



- Generally, projects that evaluate changes in floodplain storage and/or baseflow include the following components:
  - Monitoring well installation and long-term groundwater level monitoring
  - Stream gage installation and long-term stage/discharge monitoring
  - Aquifer testing (transmissivity, hydraulic conductivity, storage properties)
  - Groundwater/surface water modeling
  - Performance monitoring
- Next, we will briefly look at some graphics from previous floodplain restoration studies that demonstrate these project components

# Floodplain Reconnection Study Components



Purpose can be to characterize:

- The quantity of water offset
- The change in the timing of groundwater discharge to stream
- The change in groundwater storage

Applicable to properties of various sizes  
(as large as 2,500 acres or more)



# Floodplain Reconnection Study Components Installing Groundwater Monitoring Wells




GEOENGINEERS 

# Floodplain Reconnection Study Components

## Measuring Stream Discharge




# Floodplain Reconnection Study Components Results of Hydraulic (Slug) Testing

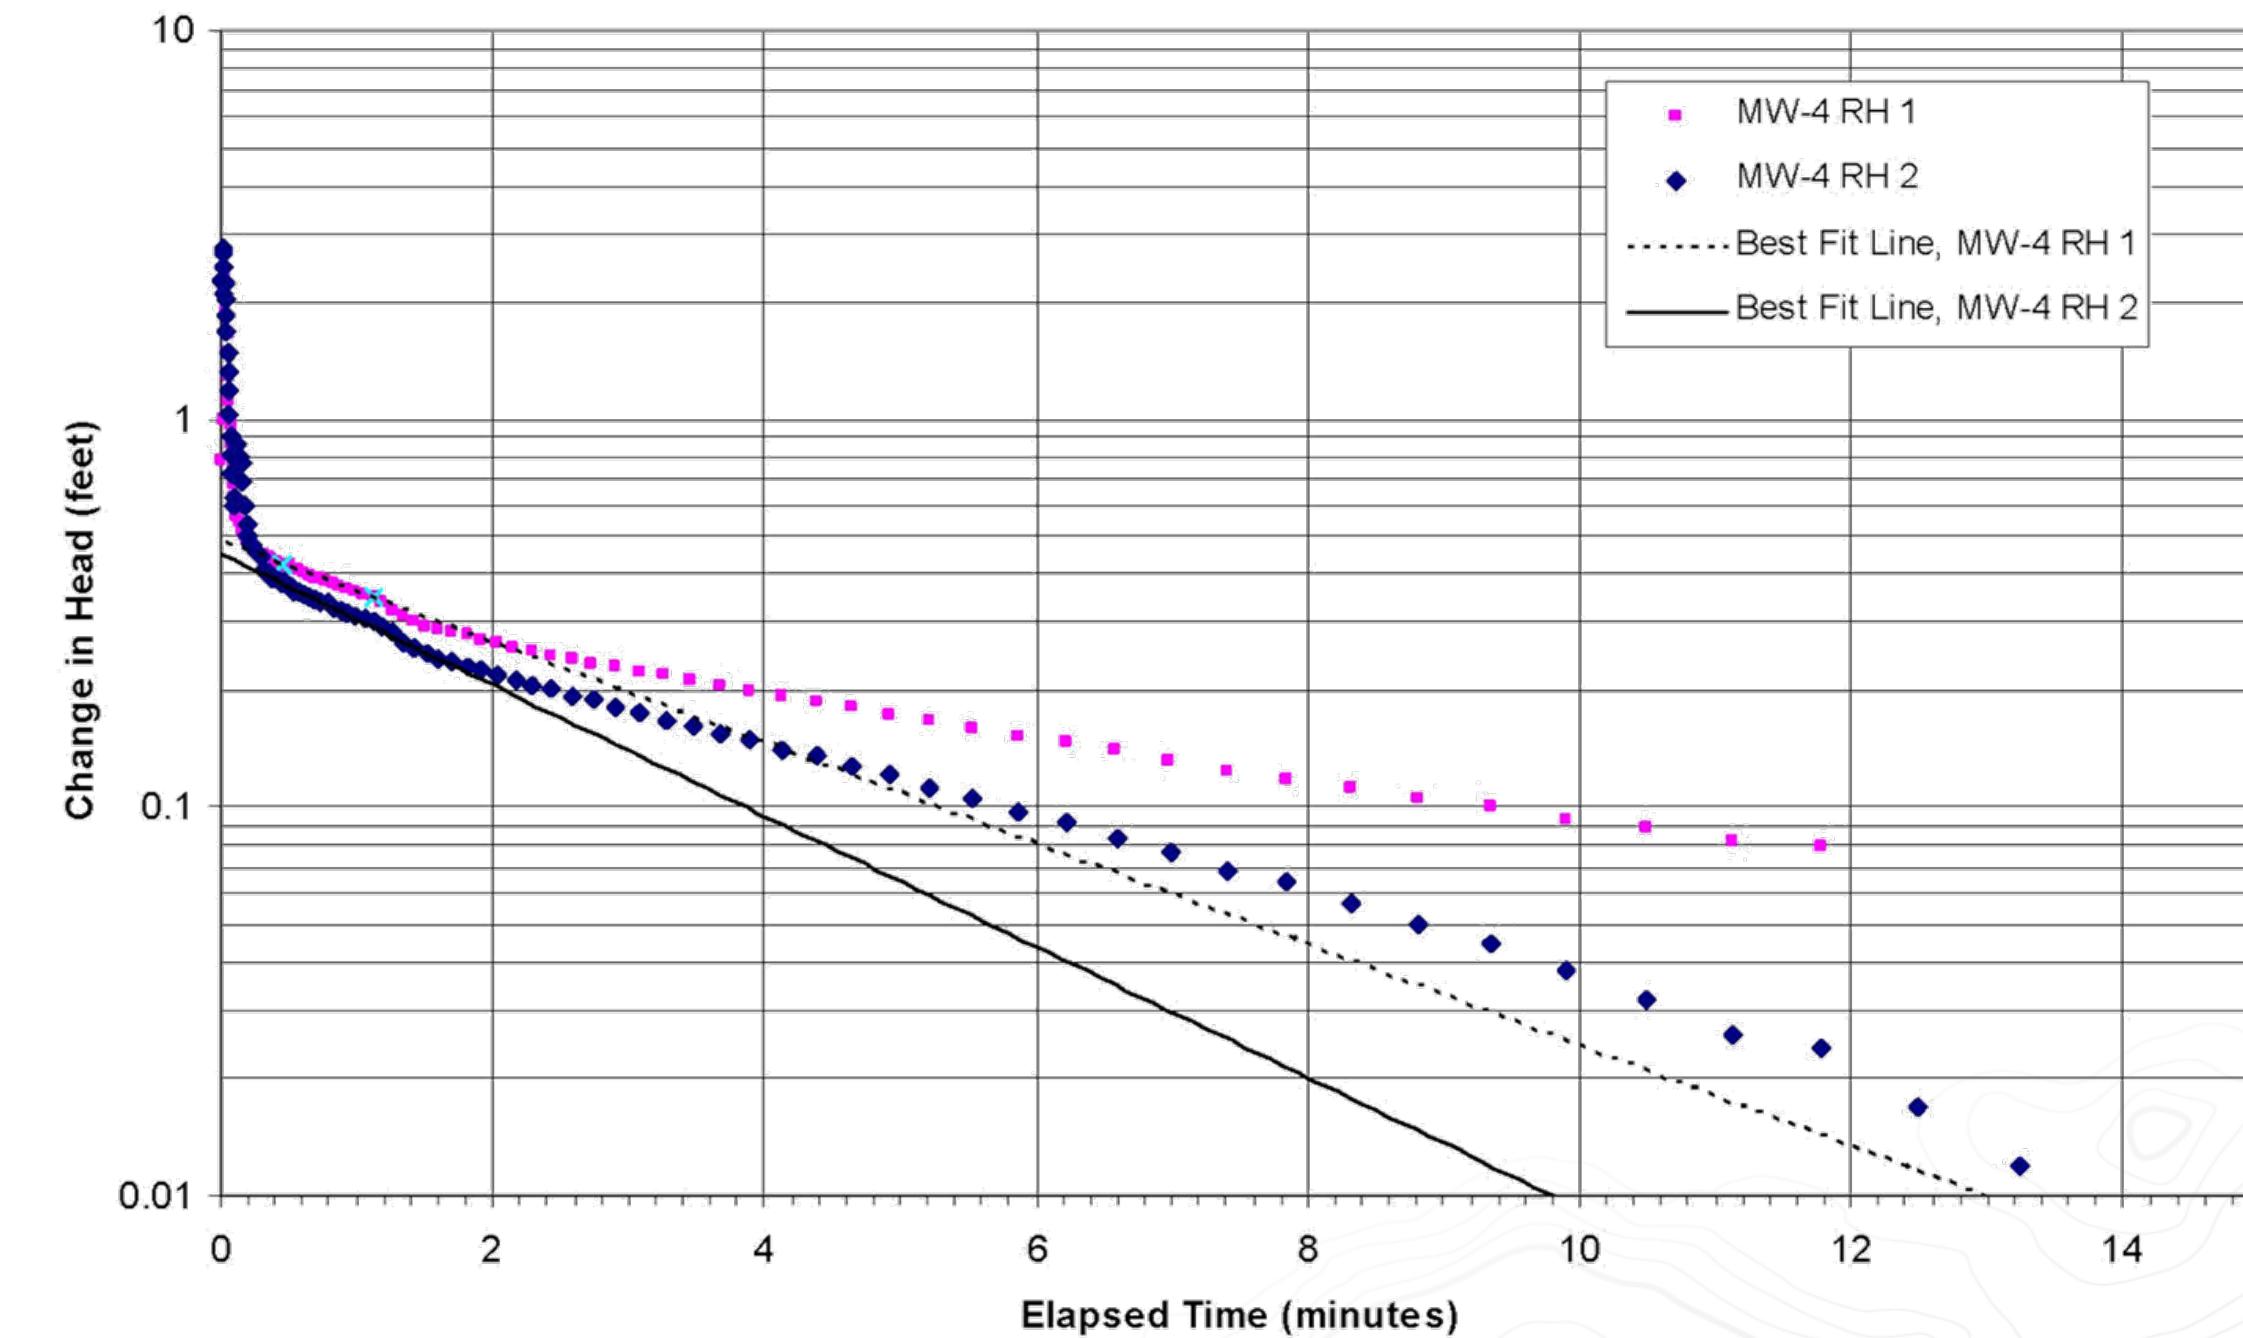



# Floodplain Reconnection Study Components


## Long-term Groundwater Monitoring Data

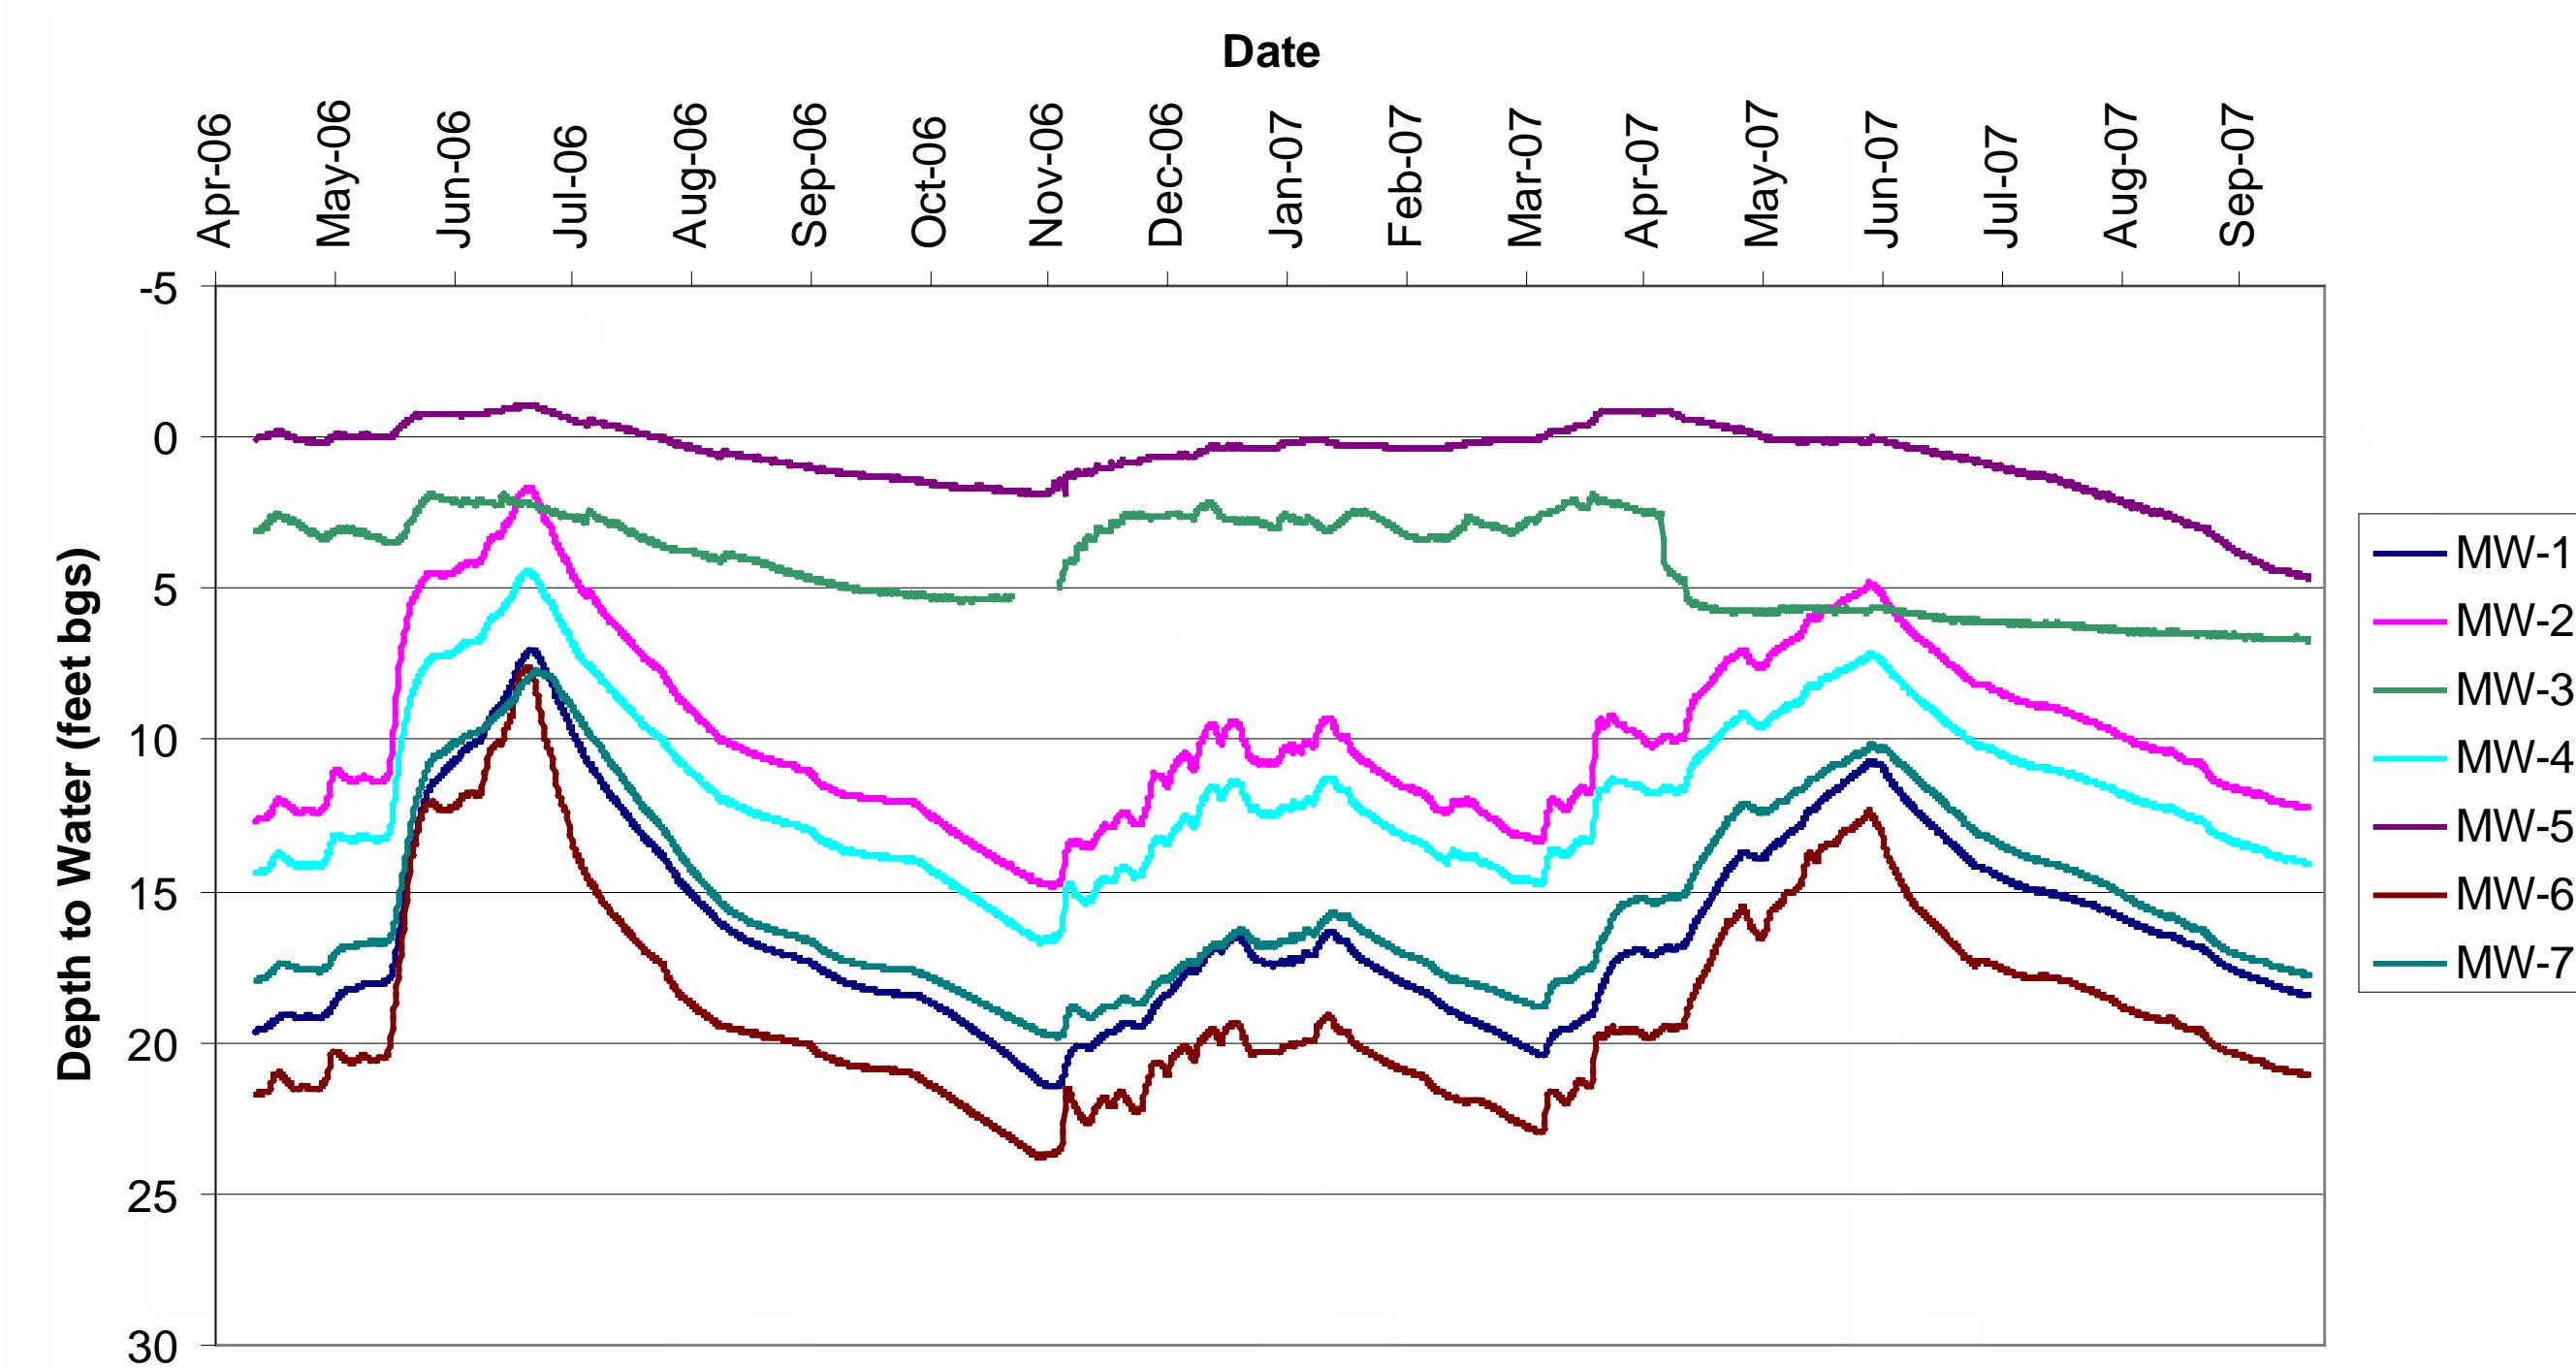

# Floodplain Reconnection Study Components

Groundwater flow models are developed to simulate the post-restoration change in:

- Groundwater levels
- The direction and quantity of hydraulic exchange between creek and river
- Storage within the alluvial aquifer
- Seasonality of the above

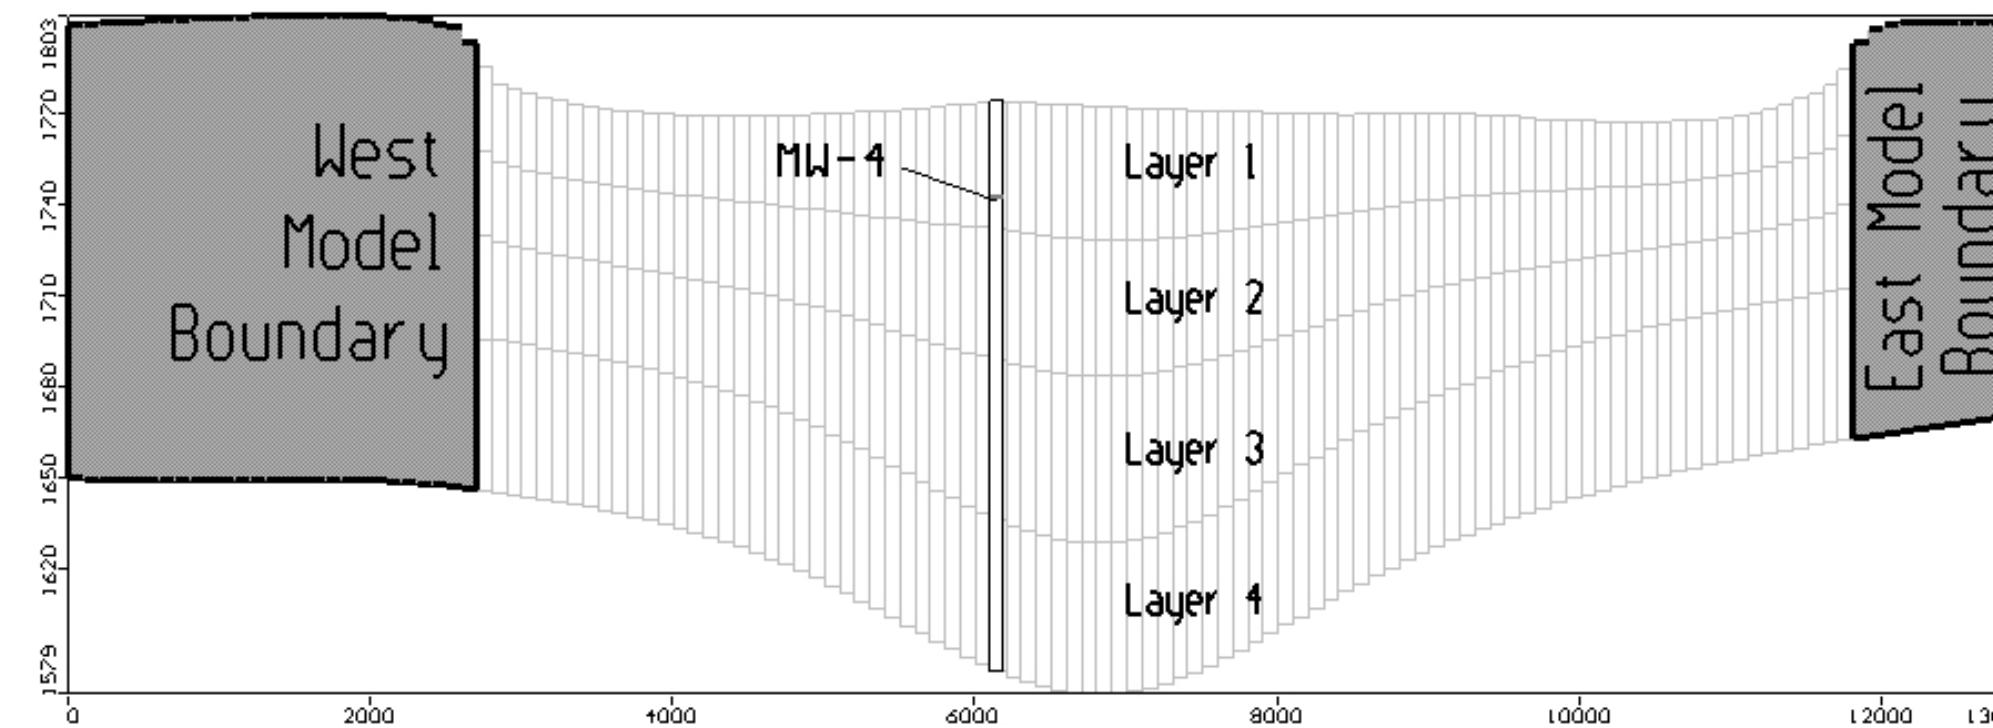



# Floodplain Reconnection Studies

## Timeline and Cost?

- Generally 2 to 3 years
- Approximately \$50K to \$100K for groundwater studies on larger properties

## What Type of Conclusions are Generated?

- The increase in recharge to the alluvial aquifer – can seasonally exceed 0.5 cfs for larger projects, much of which emerges as baseflow
- The increase in groundwater levels – can increase on average by 0.5 feet or more
- The increase in groundwater storage in alluvial aquifer pore space – can exceed 100 acre-feet on larger projects



This type of approach is:

- Multi-year
- Field-intensive
- Modeling-intensive
- Budget-intensive

# Case Studies: Trout Creek, near Lake Tahoe, California

- Summary Description
  - Trout Creek was reengineered in 2001 to increase stream/floodplain connectivity
  - Sinuosity was enhanced, slope decreased, and channel elevation increased over a 3,000-meter reach
  - Hydrologic impacts were characterized by detailed stream stage and groundwater level monitoring of Trout Creek before and after a channel restoration project
- Objective
  - Evaluate the effectiveness of stream channel reengineering to improve ecologic function by increasing summer water availability in riparian areas
- Conclusions
  - Restoration has a **seasonal impact**
  - **Increased streamflow** during summer; 11 percent in June and 24 percent in July
  - **Decreased depth to groundwater** across wide range of streamflow

Citation: Tague, C., S. Valentine, and M. Kotchen (2008), Effect of geomorphic channel restoration on streamflow and groundwater in a snowmelt-dominated watershed, *Water Resour. Res.*, 44, W10415, doi:10.1029/2007WR006418

# Case Studies: Ninemile Creek, Northwest Montana

- Summary Description
  - Ninemile Creek, a Clark Fork tributary, was degraded (straightened, incised) by placer mining in the 1800s
  - Trout Unlimited restored a portion (351 m reach) by filling dredge ponds and restoring a meandering channel
  - This study compared the hydrology of the restored reach with a degraded reach
  - Study components included topographic and morphologic surveys, well transects, and groundwater level monitoring
  - The study used tracer testing (including <sup>222</sup>Radon) to monitor hydraulic exchange between the Creek and aquifer
- Objective
  - Evaluate stream restoration effects on aquifer storage and hydraulic exchange between the restored reach and the adjacent alluvial aquifer
- Conclusions
  - Restoration can **increase storage and baseflow discharge**
  - In the degraded portion of the creek, groundwater was rapidly transported to the creek with reduced groundwater storage
  - In the restored reach:
    - **Longer** early season period of **alluvial recharge**
    - **Groundwater discharge was delayed**
    - **Baseflow extended** further into the low flow period
    - **Increased underflow**

*Citation: Brissette, Christine M., "Stream restoration effects on hydraulic exchange, storage and alluvial aquifer discharge" (2017). Graduate Student Theses, Dissertations, & Professional Papers. 10992.*

# Case Studies: Indian Creek, Kittitas County, Washington

- Summary Description

- Indian Creek, a Teanaway River tributary, was degraded (incised, disconnected from floodplain) by railroad/logging/grazing
- Beginning in 2014, the Yakama Nation and partners restored reaches of the creek to improve fish habitat
- Restoration was based on large woody debris placement
- This study consisted of detailed groundwater level monitoring along multiple transects

- Objective

- Evaluate the relationship between large wood-based stream restoration and the groundwater regime

- Conclusions

- Restoration generally resulted in **increased groundwater elevations and groundwater storage**
- The groundwater flow regime **does not conclusively indicate** significantly increased late-season streamflow (because of hydraulic gradient changes)
- However no streamflow data were incorporated

*Citation: Boylan, Nora, "Assessing the link between large wood restoration and groundwater storage and recharge: an investigation of Indian Creek in Washington State" (2019). A THESIS submitted to Oregon State University in partial fulfillment of the requirements for the degree of Master of Science.*

# Case Studies: Nash et. al. Quantitative (Water Balance) Analysis

- Summary Description
  - This study was a modeling exercise of a hypothetical stream
  - It examined three different channel incision scenarios representing a stream in various stages of restoration
- Objective
  - Evaluate theoretical impact of stream restoration on aquifer storage and streamflow
- Conclusions
  - **Less incised streams** are associated with **increased aquifer storage**
  - However, lateral groundwater flow to the less incised stream is lower because of:
    - Reduction in streambed elevation
    - Reduction in hydraulic gradient
    - Increase in riparian vegetation and associated evapotranspiration
  - This analytical exercise suggested that significant late-summer streamflow increases **might not** result from wet meadow restoration.

Citation: Nash, C. S., Selker, J. S., Grant, G. E., Lewis, S. L., & Noël, P. (2018). A physical framework for evaluating net effects of wet meadow restoration on late-summer streamflow. *Ecohydrology*.



# Key Considerations

- Data needs and data availability make it hard to rigorously quantify offsets from habitat projects
- To rigorously quantify offsets, some data needs include:
  - Project design
  - River stage
  - Timing of water need (summer low-flow; winter rearing habitat)
  - Shallow groundwater levels
  - Groundwater/surface water interaction (gaining/losing)
  - Floodplain aquifer geometry and hydraulic characteristics (hydraulic gradient, hydraulic conductivity, storage characteristics, porosity)
  - Seasonal variation in the above
- Aquatic habitat limiting factors and critical habitat needs
- Published citations reviewing the water offset benefits of habitat projects have shown **conflicting results**

# Estimating Water Offset Potential with Limited Time and Budget?

To quickly estimate offset quantity, consider a simplified analytical approach based on Darcy's Law that focuses on the groundwater/surface water interface:


## Step 1

Characterize the geometry of:

- The pre-construction stream and aquifer
- The post-construction stream and aquifer
- The newly-saturated wedge of sediments

## Variables

- Interface height
- Length of impacted stream reach
- Interface area
- One side of stream or two
- Gaining/losing

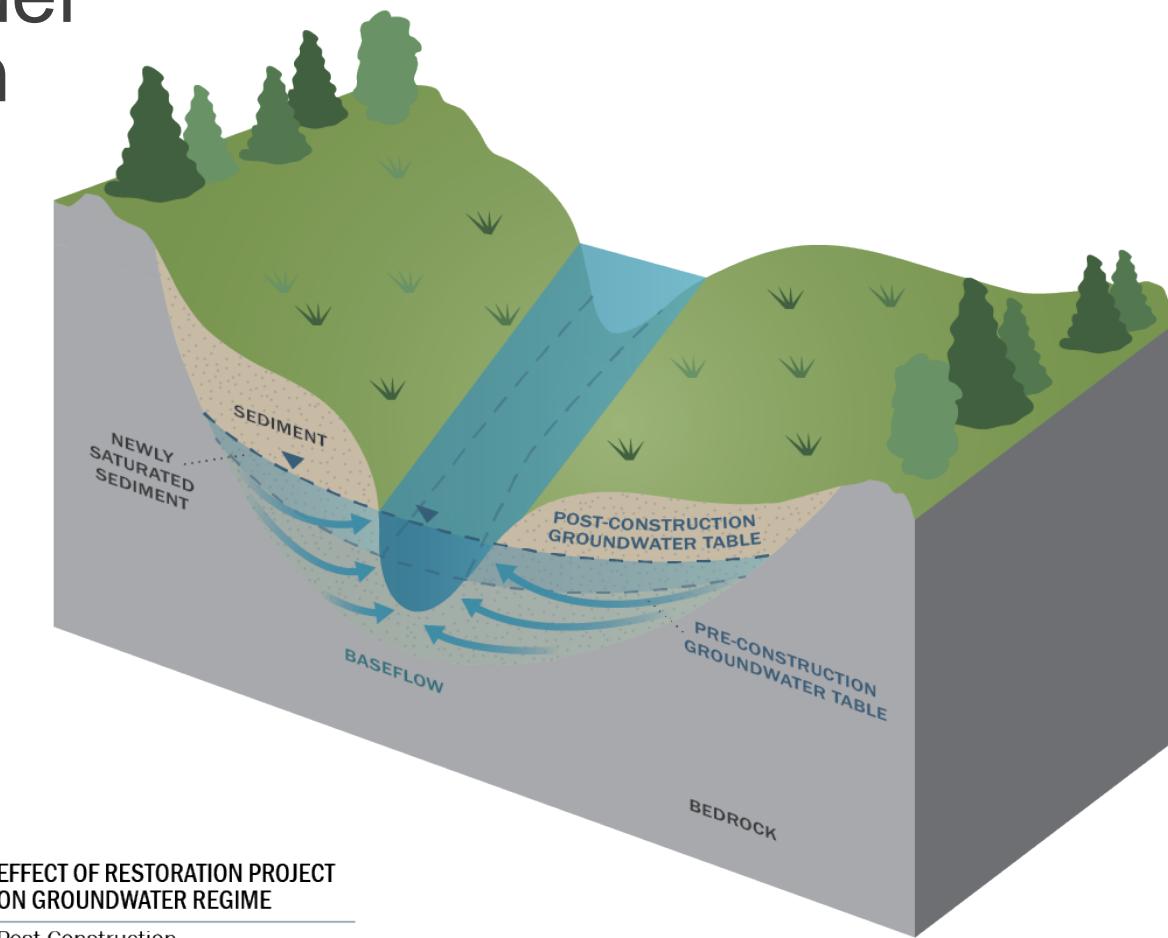


# Estimating Water Offset Potential with Limited Time and Budget?

## Step 2

Estimate hydraulic conductivity (K)

- Aquifer
- Groundwater/surface water interface

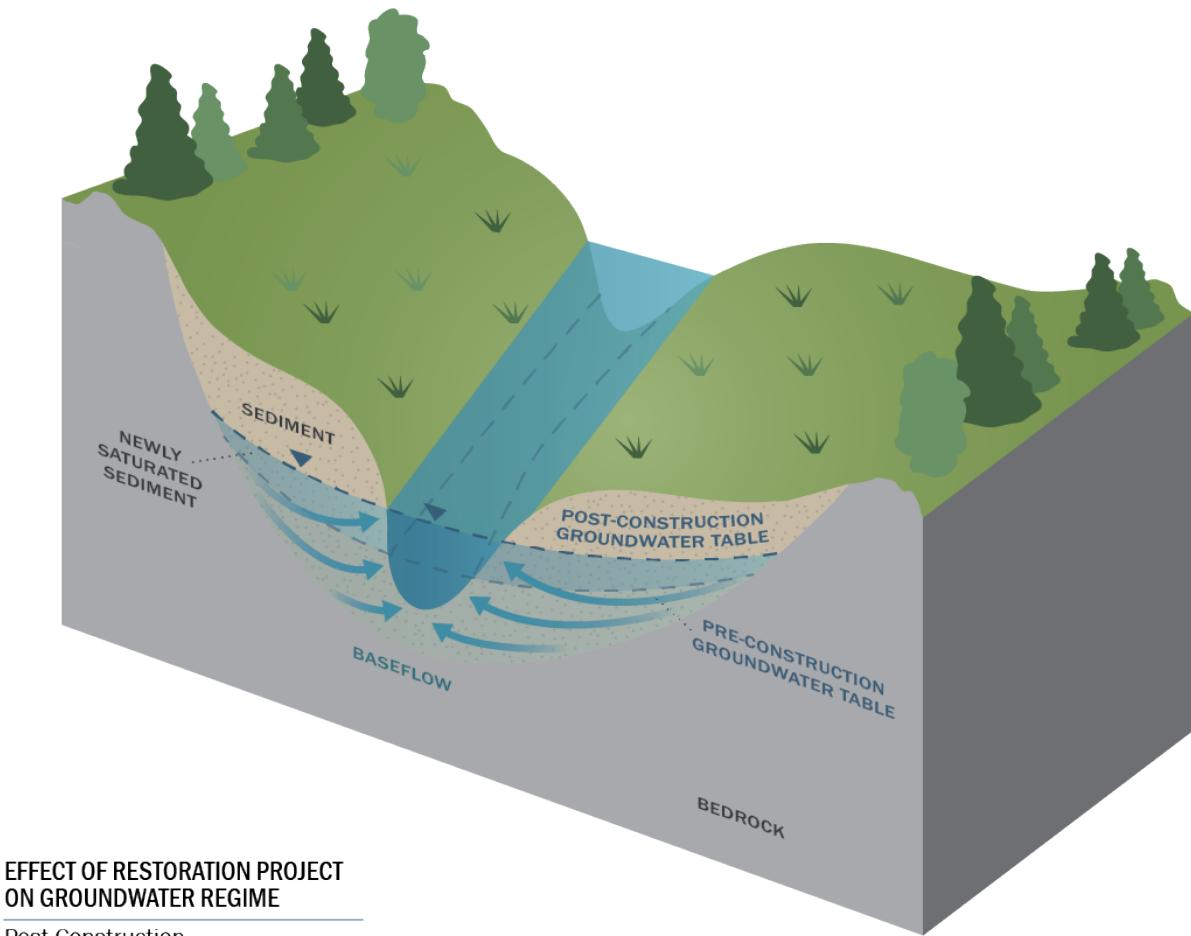


EFFECT OF RESTORATION PROJECT  
ON GROUNDWATER REGIME  
Post-Construction

# Estimating Water Offset Potential with Limited Time and Budget?

## Step 3

### Estimate Hydraulic Gradient ( $dH/dL$ )

- Pre-construction
- Post-construction

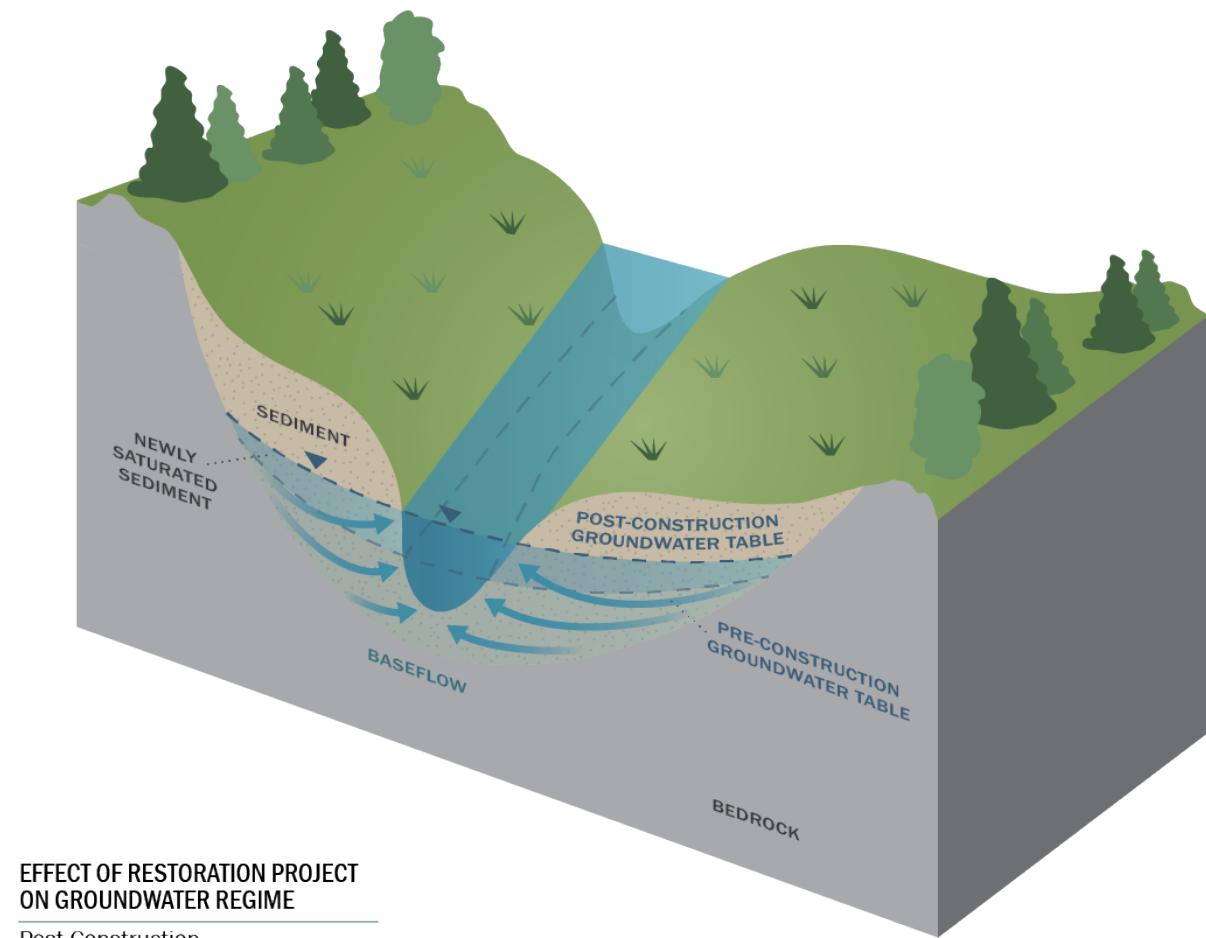

# Estimating Water Offset Potential with Limited Time and Budget?

## Step 4


Calculate flow ( $Q$ ) through the groundwater/surface water interface for both the pre- and post-construction condition.

$$Q = K * A * dH/dL$$

Eqn 1

$Q_{pr}$  = Pre-construction flow

$Q_{po}$  = Post-construction flow

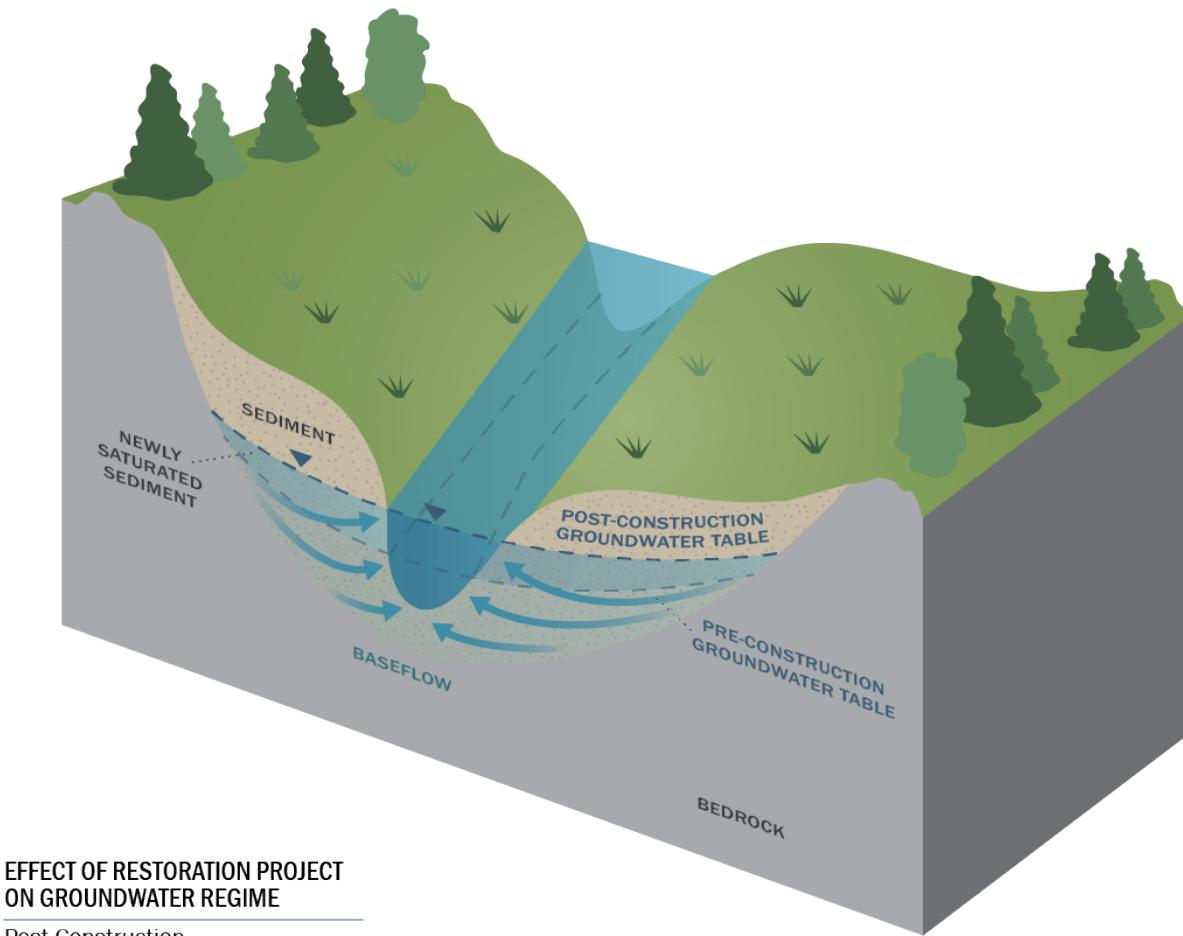

EFFECT OF RESTORATION PROJECT  
ON GROUNDWATER REGIME  
Post-Construction

$$\text{Potential offset benefit} = Q_{po} - Q_{pr}$$

Eqn 2

# Estimating Subsurface Storage Potential with Limited Time and Budget?


Subsurface storage potential is assumed to be equivalent to the pore space of the newly saturated wedge

## Step 1

Calculate wedge volume (V)

Volume of trapezoidal prism =  
 $(a + b)/2 * h * \text{length of wedge}$

Eqn 3

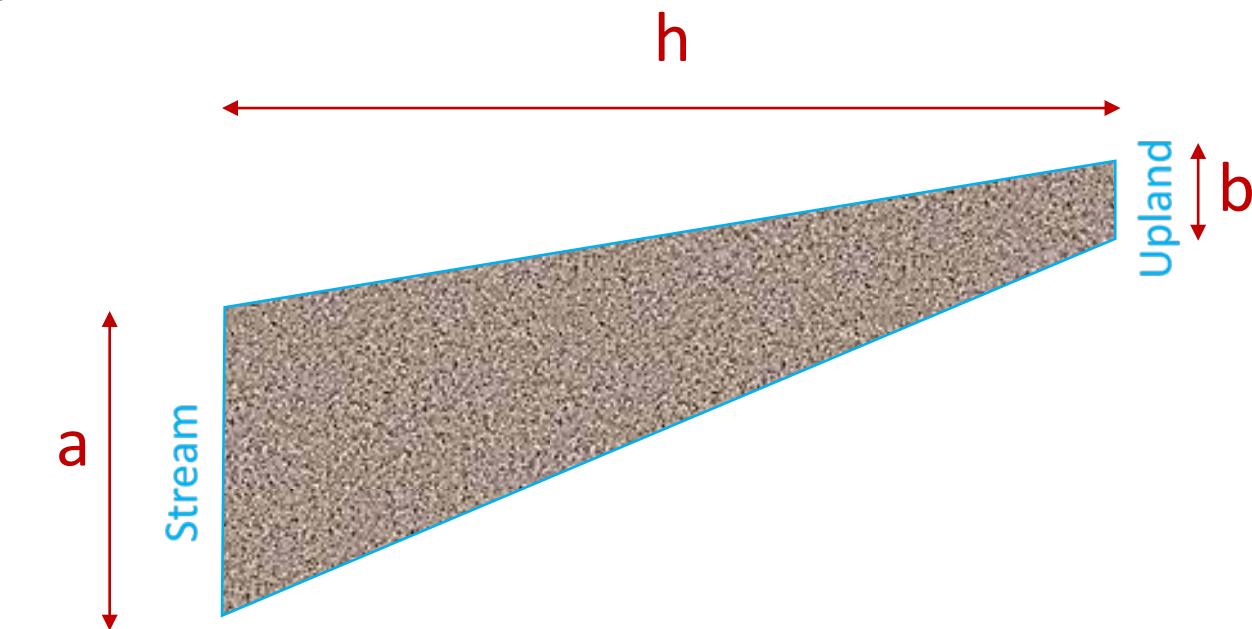

## Step 2

Estimate effective soil porosity ( $n_e$ )

## Step 3

**Calculate subsurface storage potential ( $S_p$ )**

$$S_p = V * n_e$$

Eqn 4

# WRIA 7 Example

## Lower Tolt Floodplain Reconnection



**Project Overview**  
*Lower Tolt River Floodplain Reconnection Project*



# Lower Tolt Floodplain Reconnection Water Offset Inputs

## Hydraulic conductivity

$K$  (aquifer) = 200 feet per day (ft/d)

$K$  (interface) = 200 ft/d

## Groundwater/surface water interface area

### – Pre-construction

- Interface height = 5 ft
- Length of impacted stream reach = 2,500 ft
- Interface area (one side) = 12,500 ft<sup>2</sup>

### – Post-construction

- Interface height = 8 ft
- Length of impacted stream reach = 2,500 ft
- Interface area (one side) = 20,000 ft<sup>2</sup>



## Hydraulic Gradient

- $dH/dL$  (pre) = 0.007 ft/ft (approximate ground surface slope)
- $dH/dL$  (post) = 0.005 ft/ft (30 percent reduction)

# Lower Tolt Floodplain Reconnection Water Offset Estimate

$$\text{Flow} = Q = K * A * dH/dL$$

## Pre-construction

$$Q_{\text{pr}} = 200 \text{ ft/d} * 12,500 \text{ ft}^2 * 0.007 \text{ ft/ft}$$

$$Q_{\text{pr}} = 17,500 \text{ ft}^3/\text{d}$$

$$Q_{\text{pr}} = 0.20 \text{ cfs}$$

## Post-construction

$$Q_{\text{po}} = 200 \text{ ft/d} * 20,000 \text{ ft}^2 * 0.005 \text{ ft/ft}$$

$$Q_{\text{po}} = 20,000 \text{ ft}^3/\text{d}$$

$$Q_{\text{po}} = 0.23 \text{ cfs}$$



**Potential offset benefit =  $Q_{\text{po}} - Q_{\text{pr}} = 0.03 \text{ cfs or } 21 \text{ ac-ft/yr}$**   
Eqn 4

# Lower Tolt Floodplain Reconnection Subsurface Storage Potential Estimate


- Inputs

- $a = 3 \text{ ft}$
- $b = 1 \text{ ft}$
- $h = 850 \text{ ft}$
- Length of wedge = 2,500 ft
- One side
- $N_e = 30 \text{ percent}$

- Wedge volume =  $4,250,000 \text{ ft}^3$


- Results

$$S_p = 1,275,000 \text{ ft}^3 \text{ or } 29 \text{ acre-feet}$$

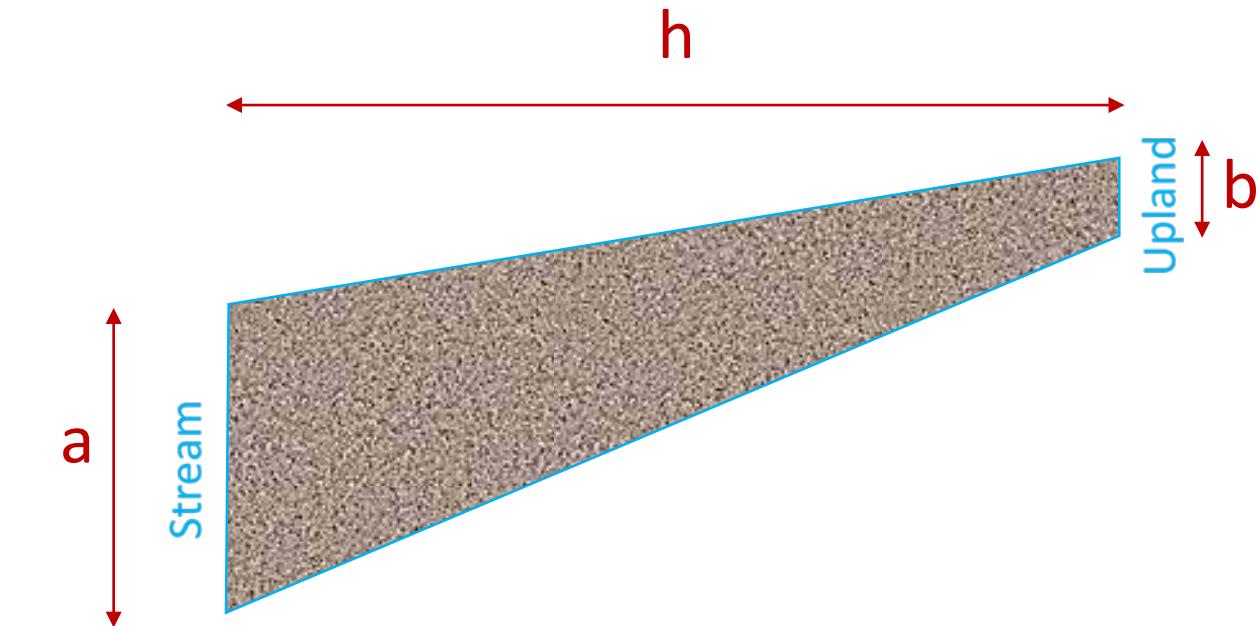

# Disadvantages to this approach

- Uncertainty
  - Hydrogeologic conceptual model (floodplain connection, gaining/losing, etc.) could be inaccurate
  - Assumptions are imprecise
    - Floodplain water level impact
    - Hydraulic conductivity
    - Hydraulic gradient
    - Effective porosity
  - Results are imprecise
- Analysis is steady-state
  - Does not provide information on seasonality or timing of benefits

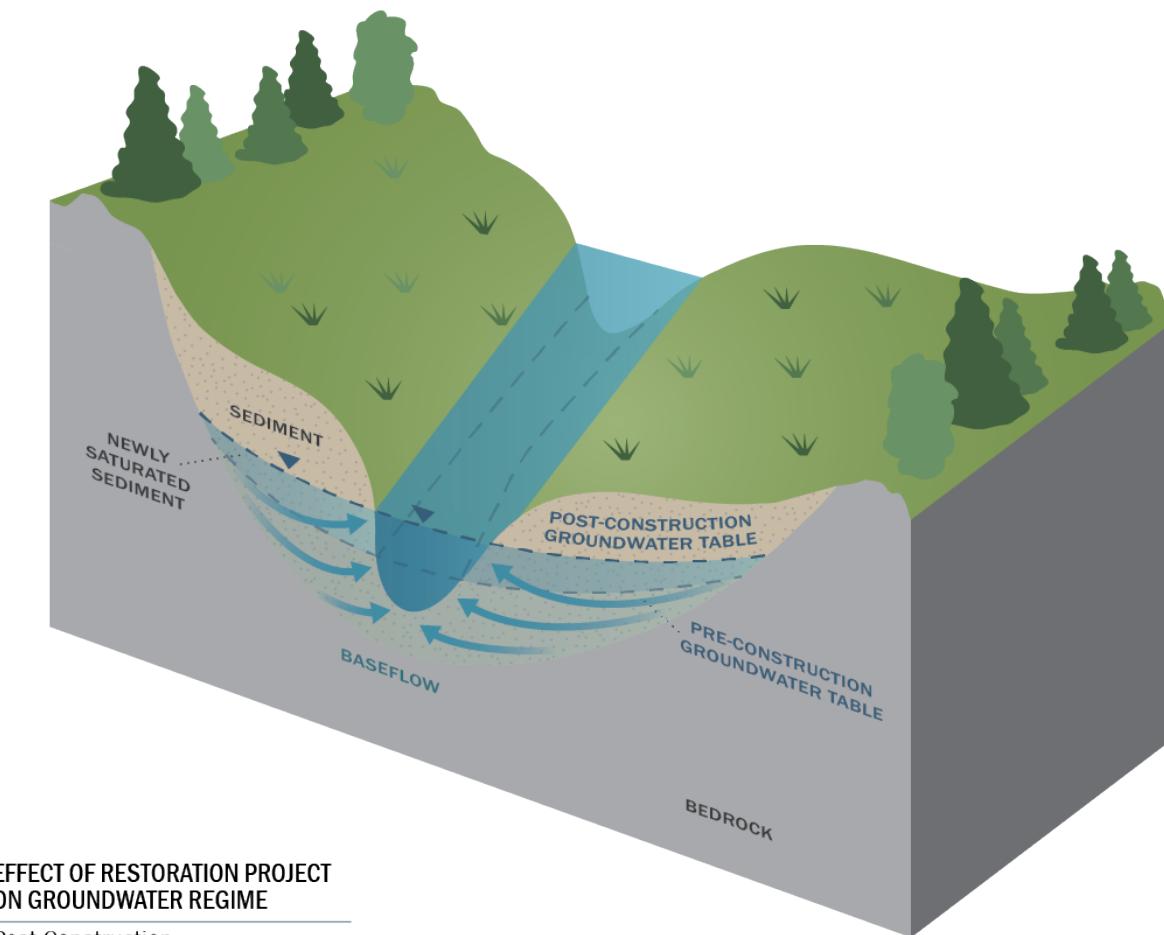

# Uncertainty

- “Difficult to quantify the offset benefits, potentially increasing uncertainty in calculating water offset quantities for the plan, and therefore potentially increasing uncertainty in the plan’s conclusions and assurances.”<sup>1</sup>
- Why is it difficult to quantify?
  - Method based on assumptions
  - Scarcity of existing, baseline monitoring projects and examples
  - Some habitat projects will not provide offset water on a reliable, annual basis (they need occasional, unpredictable flood flows to introduce water into the habitat space and therefore may not reliably provide offset water needed to offset new, permit-exempt uses on an annual basis)
  - Simulation of system through models is data intensive

# Conclusions

- The NEB Guidance requires offset for as long as the new PE wells are in use
- Water offsets for habitat projects are very difficult to quantify with certainty
- Offsets can be expected to generally be low, particularly for smaller sites/projects
- Rigorous investigation methods are time-, labor-, and budget-intensive
- Due to time and resource limitations, GeoEngineers proposes a simplified analytical method to estimate water offset potential for habitat projects that is defensible (using realistic assumptions) given the likely small offset volumes
- Habitat projects are of value and can contribute to NEB without having a precisely quantifiable offset (NEB Guidance Section 3.2.3.5D)



# Next Steps

- There are hundreds of habitat projects inventoried per WRIA – detailed offset analysis is not practical
- The following characteristics tend to increase the offset benefit:
  - Large water level (groundwater table) impact
  - Increased length of impacted reach
  - High hydraulic conductivity of aquifer/interface
  - High hydraulic gradient
- The following characteristics tend to extend the offset benefit further into the low-flow period:
  - Large water level (groundwater table) impact
  - Broad alluvial valley/thick sediment sequence
  - Low hydraulic conductivity of aquifer/interface (conflict with above)
  - Low hydraulic gradient (conflict with above)

# Next Steps

- Analyzing a subset of likely projects to estimate water offset potential could be an appropriate next step. The subset could be filtered from the full inventory list by prioritizing for:
  - Project type (levee setback, floodplain restoration, etc.)
  - Project size (floodplain acreage, length of reach, etc.)
  - Aquifer characteristics (geologic unit, minimum anticipated K, etc.)
- The consultant team could evaluate the subset using a methodology similar to the Lower Tolt example



# Questions?

Thank you!


---



# Workgroup/ Projects Subgroup Progress

WRIA 7 WRE Committee

February 13, 2020

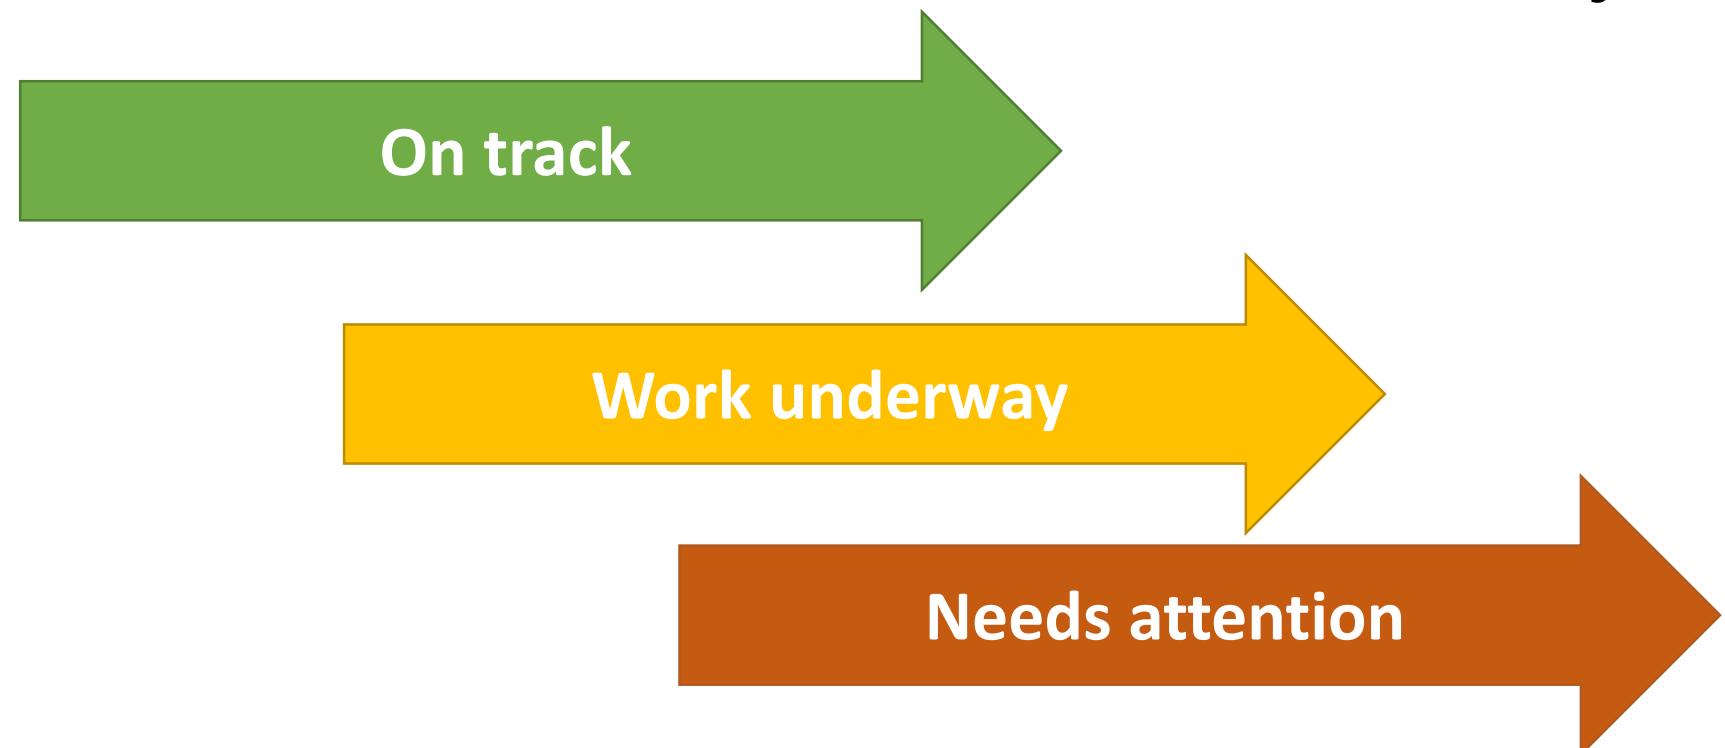



# Where are we?!

- Technical Workgroup:

- Recommended Planning Horizon Consumptive Use Estimate
  - Began discussion of safety factors, targets

- Projects Subgroup:

- Stepped away from screening criteria
  - Gained clarity about definitions and representatives positions/questions on different project type
  - Learned about potential storage and MAR project ideas in the basin
  - Started mapping role of each subbasin – Salmon Conservation Plan, Snohomish Basin Protection Plan
  - Identifying guiding principles
  - Organized projects by sub-basin – adding new projects, focal areas



# We began dividing offset project types for clarity

## Water Rights Acquisitions

Quantifiable?  
Yes

Projects ID'd?  
Searching

## Non-acquisition Water Offset Projects

Quantifiable?  
Yes

Projects ID'd?  
Some


## Habitat projects with hydrologic benefit

Quantifiable?  
Maybe

Projects ID'd? Yes

## “Other”

# Big picture – Where are we?

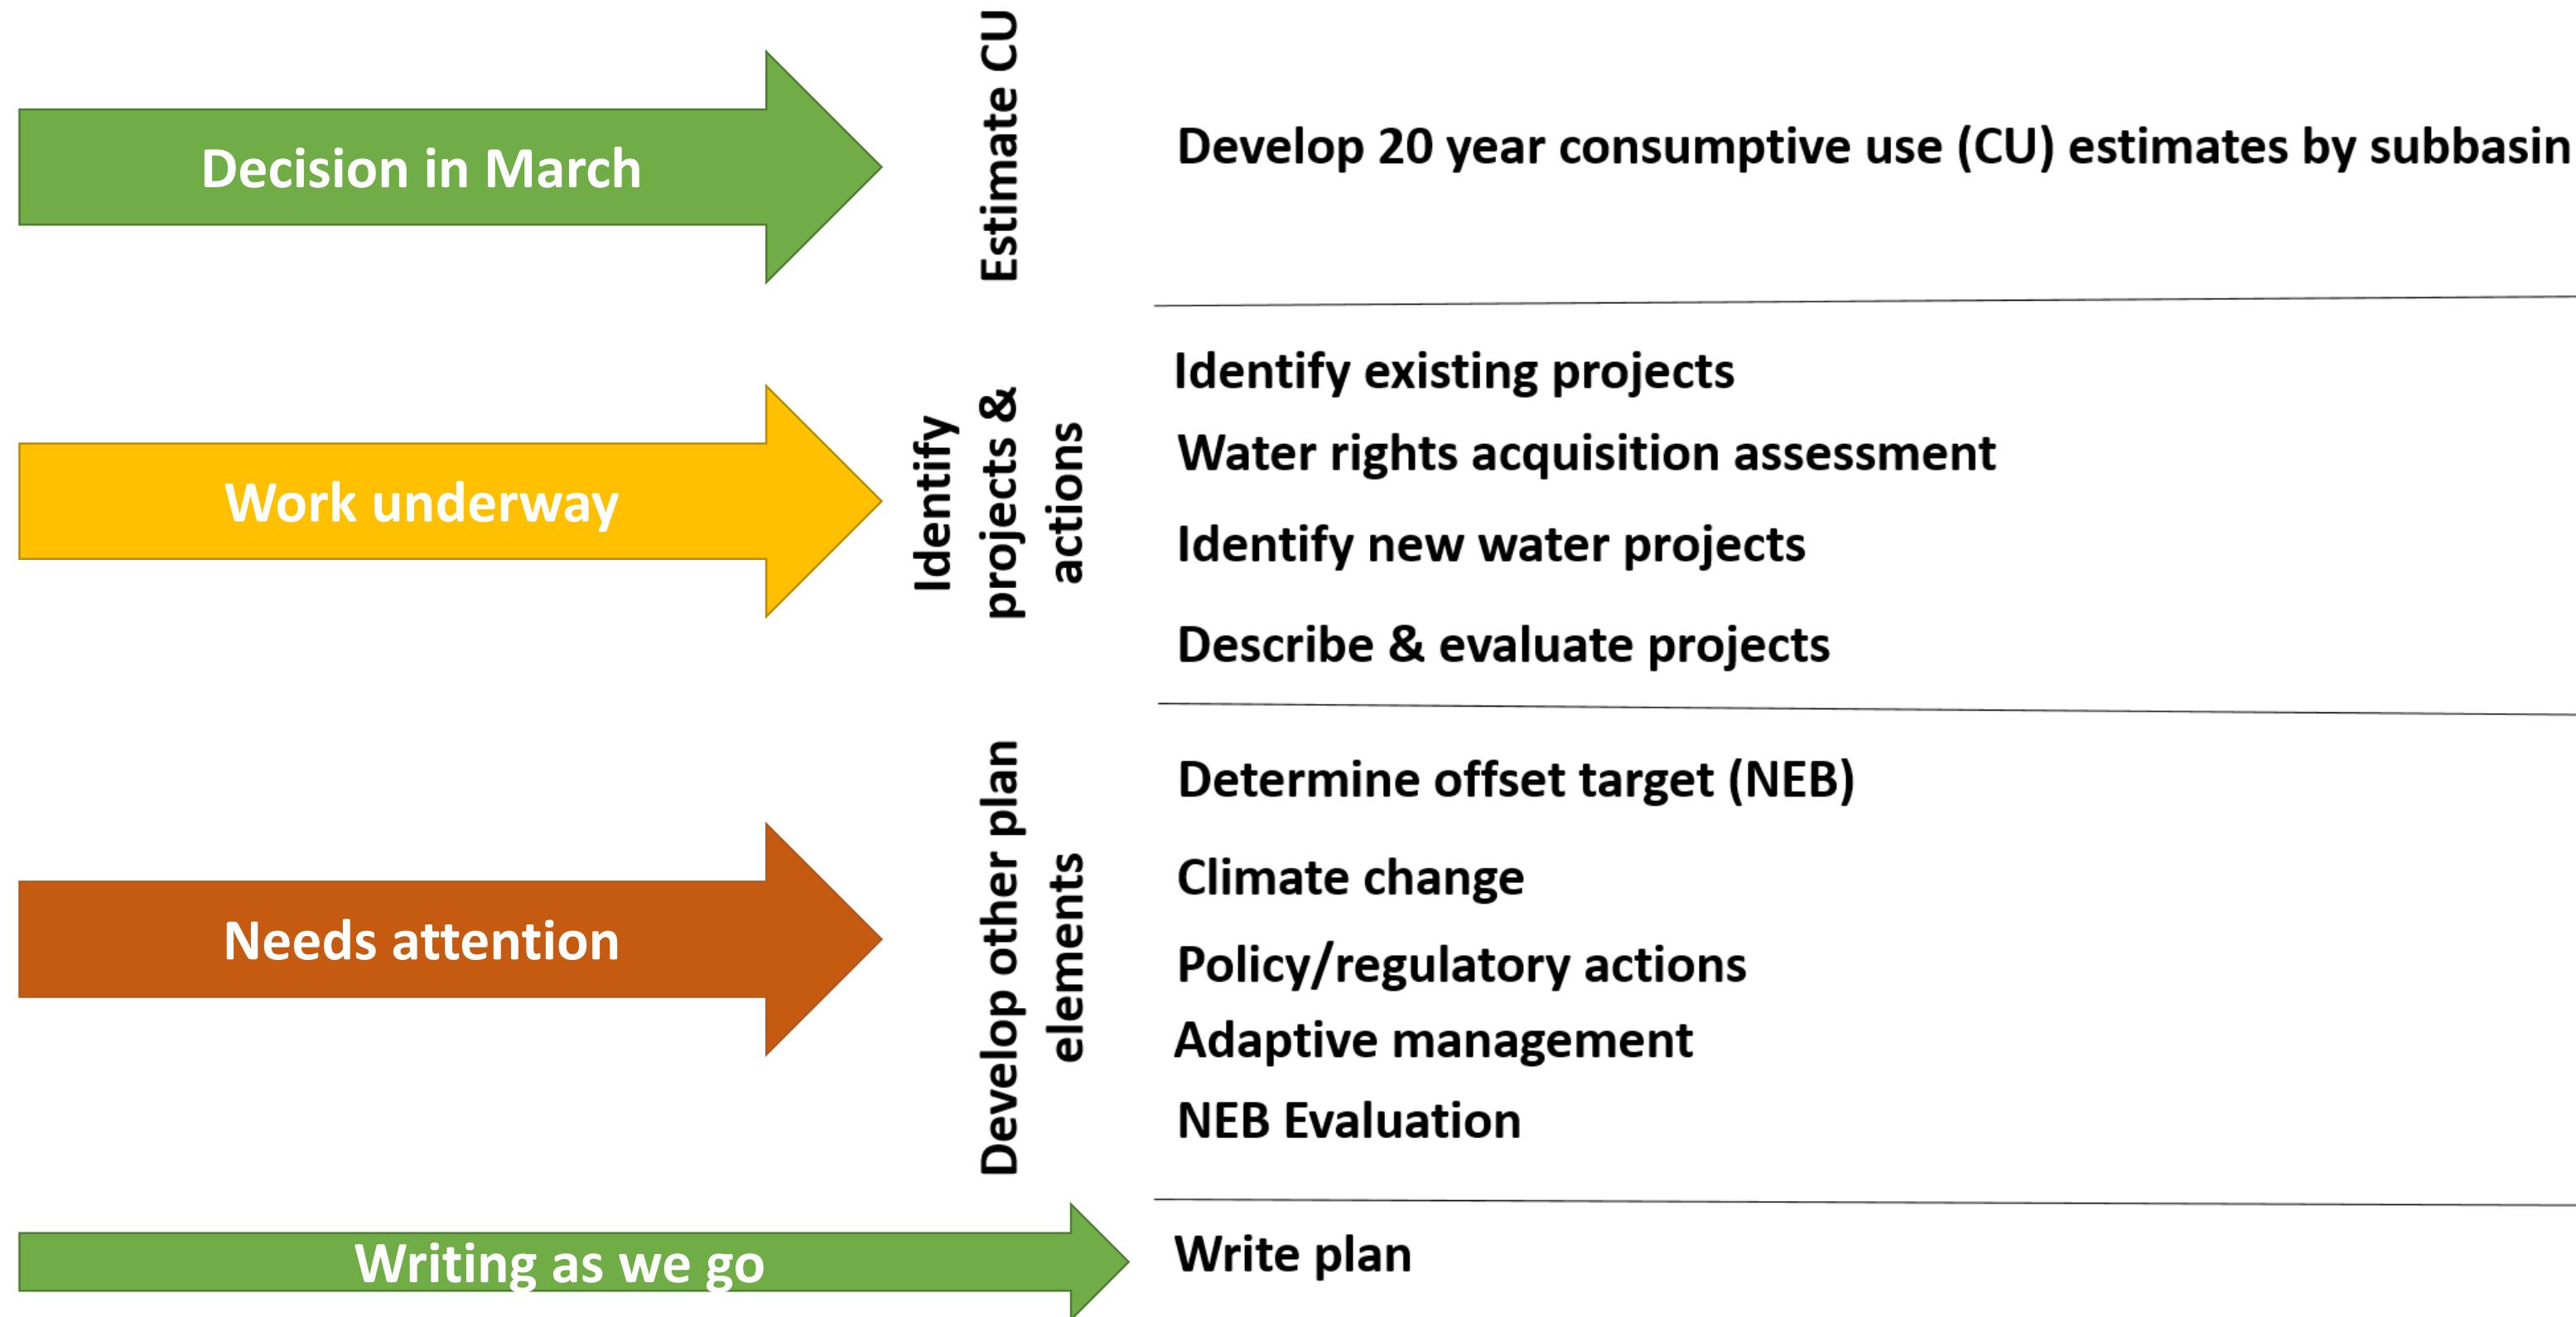

# Work ahead – Tech Workgroup

- Meet in February to work on safety factors, scenarios, targets
- Pause and join Projects Subgroup to get more context

# Work ahead – Projects subgroup

- ID habitat projects for GeoEngineers to estimate water offset
- Develop guiding principles
- Update on water right acquisition progress
- Dig into project types and roles of sub-basins
  - Grow the list where we need to
  - Screen the projects where we need to
  - Consider how to bring projects to full committee
- Workgroup joins us less meetings and more integration!

# Work ahead – Via Disappearing Task Force?

- Policy and regulatory actions
- Adaptive Management
- Climate change
- Other elements of the plan not focused on capital projects?



# Questions/feedback/direction?

## Homework/next steps:

- Turn in plan approval process form (2/20)
- ID top three regulatory/policy actions your entity would champion.
  - ID any that are off the table for your entity.
- Prepare for March decision on CU estimate
- Dig up more projects!!